

Surge protection device - PT-IQ-4X1-24DC-PT - 2801271

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection, consisting of protective plug and base element, with integrated multi-stage status indicator on the module for four signal wires with common reference potential.

The figure shows the PT-IQ-2x2-24DC-PT version



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 160.0 g |
| Custom tariff number | 85363030 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|------------------|----------|
| Height | 109.3 mm |
| Width | 17.7 mm |
| Depth | 77.5 mm |
| Horizontal pitch | 1 Div. |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Degree of protection | IP20 |

General

| | |
|--|--------------------|
| Housing material | PA 6.6 |
| Flammability rating according to UL 94 | V-0 |
| Color | jet black RAL 9005 |
| Mounting type | DIN rail: 35 mm |

Surge protection device - PT-IQ-4X1-24DC-PT - 2801271

Technical data

General

| | |
|---------------------|--|
| Type | DIN rail module, two-section, divisible |
| Direction of action | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground |

Additional descriptions

| | |
|------|--|
| Note | Remote signaling as well as the power supply of the T-BUS are established by snapping the module onto the T-BUS. |
|------|--|

Protective circuit

| | |
|--|---|
| IEC test classification | C1 |
| | C2 |
| | C3 |
| | D1 |
| Nominal voltage U_N | 24 V DC |
| Maximum continuous voltage U_C | 30 V DC |
| | 21 V AC |
| Nominal current I_N | 700 mA (50 °C) |
| Operating effective current I_C at U_C | ≤ 1 mA (per path) |
| Residual current I_{PE} | ≤ 1 mA (per path) |
| Nominal discharge current I_n (8/20) μ s (Core-Earth) | 10 kA |
| Pulse discharge current I_{imp} (10/350) μ s (core-ground) | 2.5 kA |
| Total surge current (8/20) μ s | 20 kA |
| Impulse discharge current (10/350) μ s, peak value I_{imp} | 2.5 kA |
| Voltage protection level U_p (core-ground) | ≤ 75 V (C1 - 1 kV/500 A) |
| | ≤ 135 V (C2 - 10 kV / 5 kA) |
| | ≤ 55 V (C3 - 25 A) |
| | ≤ 60 V (C3 - 50 A) |
| Response time t_A (Core-Earth) | ≤ 1 ns |
| Input attenuation a_E , asym. | typ. 0.3 dB (≤ 300 kHz / 150 Ω) |
| Cut-off frequency f_g (3 dB), asym. (PE) in 150 Ohm system | typ. 1.1 MHz |
| Capacity (Core-GND) | typ. 2 nF |
| Resistance in series | 1.2 $\Omega \pm 5\%$ |
| Surge protection fault message | Optical, multi-stage |
| Max. required back-up fuse | 800 mA (FF) |
| Impulse durability (conductor-ground) | C1 - 1 kV/500 A |
| | C2 - 10 kV/5 kA |
| | C2 - 10 kA |
| | C3 - 50 A |
| | D1 - 2,5 kA |

Surge protection device - PT-IQ-4X1-24DC-PT - 2801271

Technical data

Protective circuit

| | |
|-------------------------------------|----------|
| Pulse reset time (conductor-ground) | ≤ 350 ms |
|-------------------------------------|----------|

Connection data

| | |
|---------------------------------------|---------------------|
| Connection method | Push-in connection |
| Connection type IN | Push-in connection |
| Connection type OUT | Push-in connection |
| Stripping length | 10 mm |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section solid min. | 0.5 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |

Connection, equipotential bonding

| | |
|-------------------|---|
| Connection method | NS 35 DIN rail or connection terminal block |
|-------------------|---|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140201 |
| eCl@ss 4.1 | 27130801 |
| eCl@ss 5.0 | 27130801 |
| eCl@ss 5.1 | 27130801 |
| eCl@ss 6.0 | 27130807 |
| eCl@ss 7.0 | 27130807 |
| eCl@ss 8.0 | 27130807 |
| eCl@ss 9.0 | 27130807 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 5.0 | EC000943 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11 | 39121610 |
| UNSPSC 12.01 | 39121610 |

Surge protection device - PT-IQ-4X1-24DC-PT - 2801271

Classifications

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 39121620 |
|-------------|----------|

Approvals

Approvals


Approvals

UL Listed / EAC / CSA / CSAus / cCSAus


Ex Approvals

Approvals submitted

Approval details

| |
|---|
| UL Listed  |
|---|

| |
|-----|
| EAC |
|-----|

| |
|---|
| CSA  |
|---|


| |
|-------|
| CSAus |
|-------|

| |
|--------|
| cCSAus |
|--------|


Drawings

Surge protection device - PT-IQ-4X1-24DC-PT - 2801271

Diagram

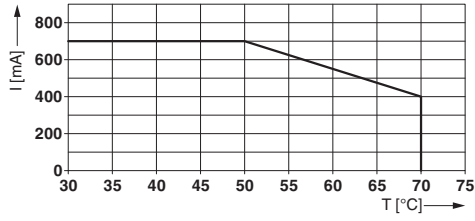

Dimensional drawing

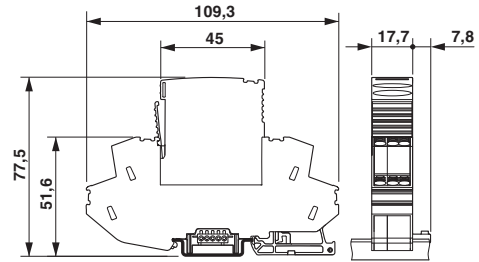

Circuit diagram

