

Jumper - BRIDGE-10 - 2900754

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

3-phase loop bridge for 10 CONTACTRON modules, with screw connection and 22.5 mm housing width, connecting cable: 0.3 m, with ferrules.




Your advantages

- ✓ Only suitable for CONTACTRON series with screw connection ELR H3...-SC-..., ELR H5...-SC-..., EMM...IFS
- ✓ Bridging of 2 to 10 devices with maximum module spacing of 22.5 mm
- ✓ Considerable reduction in wiring
- ✓ Up to 575 V AC/3 x 25 A



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 528504 |
| GTIN | 4046356528504 |
| Weight per Piece (excluding packing) | 133.800 g |
| Custom tariff number | 85444290 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|--------------------------------|-------|
| Length of the connecting cable | 0.3 m |
|--------------------------------|-------|

General

| | |
|------------------------------|----------------------|
| Operating voltage range | 42 V AC ... 575 V AC |
| Operating current | ≤ 25 A |
| Number of bridgeable modules | 10 |

Jumper - BRIDGE-10 - 2900754

Technical data

General

| | |
|-------------------------|---------------------|
| Connecting cable length | 0.3 m |
| Conductor cross section | 2.5 mm ² |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Application drawing

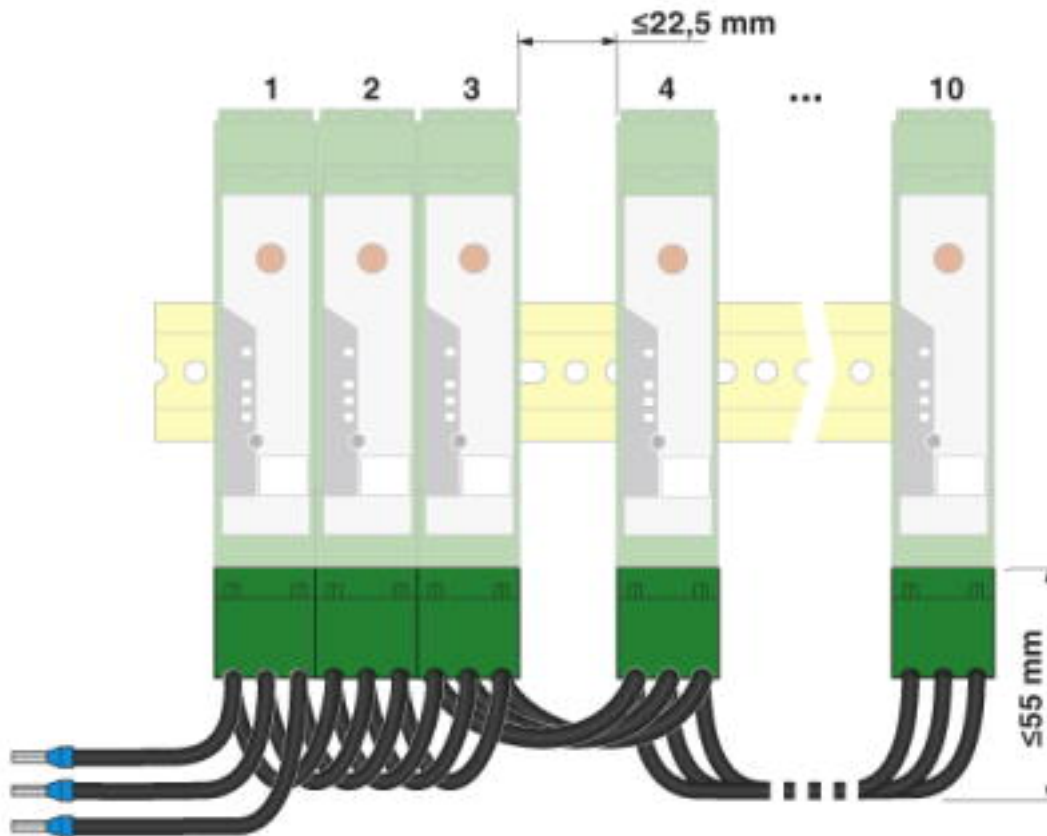


Figure shows the version BRIDGE- 4

Jumper - BRIDGE-10 - 2900754

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27371392 |
| eCl@ss 4.0 | 27378000 |
| eCl@ss 4.1 | 27378000 |
| eCl@ss 5.0 | 27379100 |
| eCl@ss 5.1 | 27379100 |
| eCl@ss 6.0 | 27379200 |
| eCl@ss 7.0 | 27379201 |
| eCl@ss 8.0 | 27379201 |
| eCl@ss 9.0 | 27379201 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC002498 |
| ETIM 5.0 | EC002498 |
| ETIM 6.0 | EC002498 |
| ETIM 7.0 | EC002498 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211802 |
| UNSPSC 7.0901 | 39121402 |
| UNSPSC 11 | 39121402 |
| UNSPSC 12.01 | 39121402 |
| UNSPSC 13.2 | 39121426 |

Approvals

Approvals

Approvals

EAC / UL Listed / cUL Listed / UL Listed / cUL Listed


Ex Approvals


Approval details


| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.A*30.B.01082 |
|-----|--|--------------------------|


Jumper - BRIDGE-10 - 2900754

Approvals

| | | | |
|-----------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm | FILE E 228652 |
|-----------|---|---|---------------|

| | | | |
|------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm | FILE E 228652 |
|------------|---|---|---------------|

| | | | |
|-----------|---|---|---------------|
| UL Listed |  | http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
|-----------|---|---|---------------|

| | | | |
|------------|---|---|---------------|
| cUL Listed |  | http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
|------------|---|---|---------------|

Accessories

Additional products

Covering hood - BRIDGE COVER - 2906240



The BRIDGE COVER covering hood is used to cover unused plugs on the CONTACTRON bridge that may subsequently be used to extend the system. The hood can be used with the screw and Push-in version of the bridge.