

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Pre-assembled relay module with push-in connection, consisting of: relay base, power contact relay, plug-in display/suppressor module, and retaining bracket. Contact type: 3 PDTs. Input voltage: 230 V AC

Product Description

The pluggable electromechanical and solid-state relays in the RIFLINE complete product range and the base are recognized and approved in accordance with UL 508.

The relevant approvals can be called up at the individual components in question.

COMPLETE RoHS

Key Commercial Data

| | |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| GTIN | |
| GTIN | 4046356731638 |
| Weight per Piece (excluding packing) | 208.000 g |
| Custom tariff number | 85364900 |
| Country of origin | Germany |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|--------|
| Width | 43 mm |
| Height | 111 mm |
| Depth | 90 mm |

Ambient conditions

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Technical data

Ambient conditions

| | |
|---|-------------------|
| Ambient temperature (operation) | -40 °C ... 40 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Degree of protection | IP20 (Relay base) |
| | RT I (Relay) |

Coil side

| | |
|---|----------------|
| Nominal input voltage U_N | 230 V AC |
| Input voltage range in reference to U_N | see diagram |
| Mains frequency | 50/60 Hz |
| Typical input current at U_N | 14 mA |
| Typical response time | 5 ms ... 25 ms |
| Typical release time range | 5 ms ... 20 ms |
| Coil voltage | 230 V AC |
| Protective circuit | Varistor |
| Operating voltage display | Yellow LED |
| Power dissipation for nominal condition | 3.22 W |

Contact side

| | |
|---------------------------------------|---------------------------|
| Contact type | 3 PDTs |
| Type of switch contact | Single contact |
| Contact material | AgNi |
| Maximum switching voltage | 440 V AC |
| | 250 V DC |
| Minimum switching voltage | 10 V (At 24 mA) |
| Min. switching current | 10 mA (at 24 V) |
| Maximum inrush current | 50 A (20 ms, N/O contact) |
| Limiting continuous current | 8 A (see diagram) |
| Interrupting rating (ohmic load) max. | 216 W (at 24 V DC) |
| | 124 W (at 48 V DC) |
| | 108 W (at 60 V DC) |
| | 52 W (at 110 V DC) |
| | 70 W (at 220 V DC) |
| | 2250 VA (for 250 V AC) |
| | 4000 VA (at 440 V AC) |
| Switching capacity | 2 A (at 24 V, DC13) |
| | 0.22 A (at 120 V, DC13) |
| | 0.11 A (at 250 V, DC13) |
| | 3 A (at 24 V, AC15) |

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Technical data

Contact side

| | |
|--------------------------------|--|
| | 3 A (at 120 V, AC15) |
| | 1.5 A (at 240 V, AC15) |
| 3-phase motor load | 1500 W |
| Motor load according to UL 508 | 1/3 HP, 120 V AC (single-phase AC motor) |
| | 1/2 HP, 240 V AC (single-phase AC motor) |
| | 1/2 HP, 240 V AC (three-phase induction motor) |

General

| | |
|--|---------------------------------------|
| Test voltage relay winding/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage relay contact/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Operating mode | 100% operating factor |
| Mechanical service life | approx. 10 ⁷ cycles |
| Mounting position | any |
| Assembly instructions | In rows with zero spacing |

Connection data

| | |
|----------------------------------|---|
| Connection name | Coil side |
| Connection method | Push-in connection |
| Stripping length | 8 mm |
| Conductor cross section solid | 0.14 mm ² ... 1.5 mm ² |
| Conductor cross section flexible | 0.14 mm ² ... 1.5 mm ² |
| | 0.14 mm ² ... 1.5 mm ² (Ferrule with plastic sleeve) |
| | 0.14 mm ² ... 1 mm ² (Ferrule with plastic sleeve, two conductors on double terminal block) |
| Conductor cross section AWG | 26 ... 16 (solid) |
| | 26 ... 16 (flexible) |

Connection data 2

| | |
|----------------------------------|---|
| Connection name | Contact side |
| Connection method | Push-in connection |
| Stripping length | 10 mm |
| Conductor cross section solid | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.14 mm ² ... 2.5 mm ² |
| | 0.14 mm ² ... 2.5 mm ² (Ferrule with plastic sleeve) |
| | 0.14 mm ² ... 1 mm ² (Ferrule with plastic sleeve, two conductors on double terminal block) |
| Conductor cross section AWG | 26 ... 14 (solid) |
| | 26 ... 14 (flexible) |

Standards and Regulations

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Technical data

Standards and Regulations

| | |
|----------------------------------|------------------|
| Connection in acc. with standard | CSA |
| Standards/regulations | DIN EN 50178 |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage | 4 kV |
| Insulation | Basic insulation |
| Pollution degree | 2 |
| Overvoltage category | III |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276


Circuit diagram

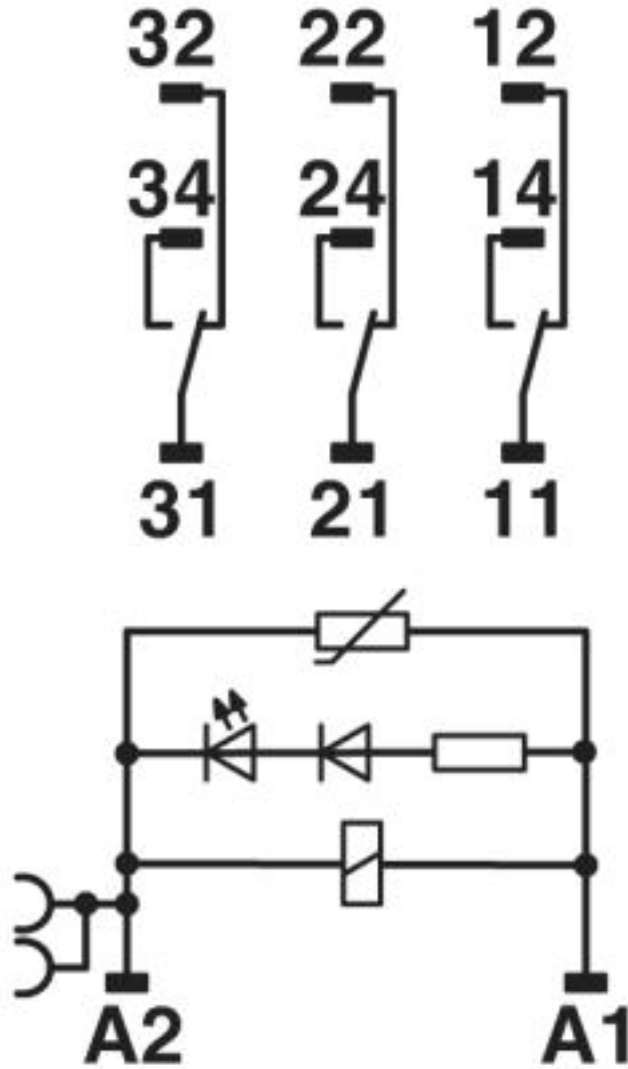

AC coils

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276


Diagram

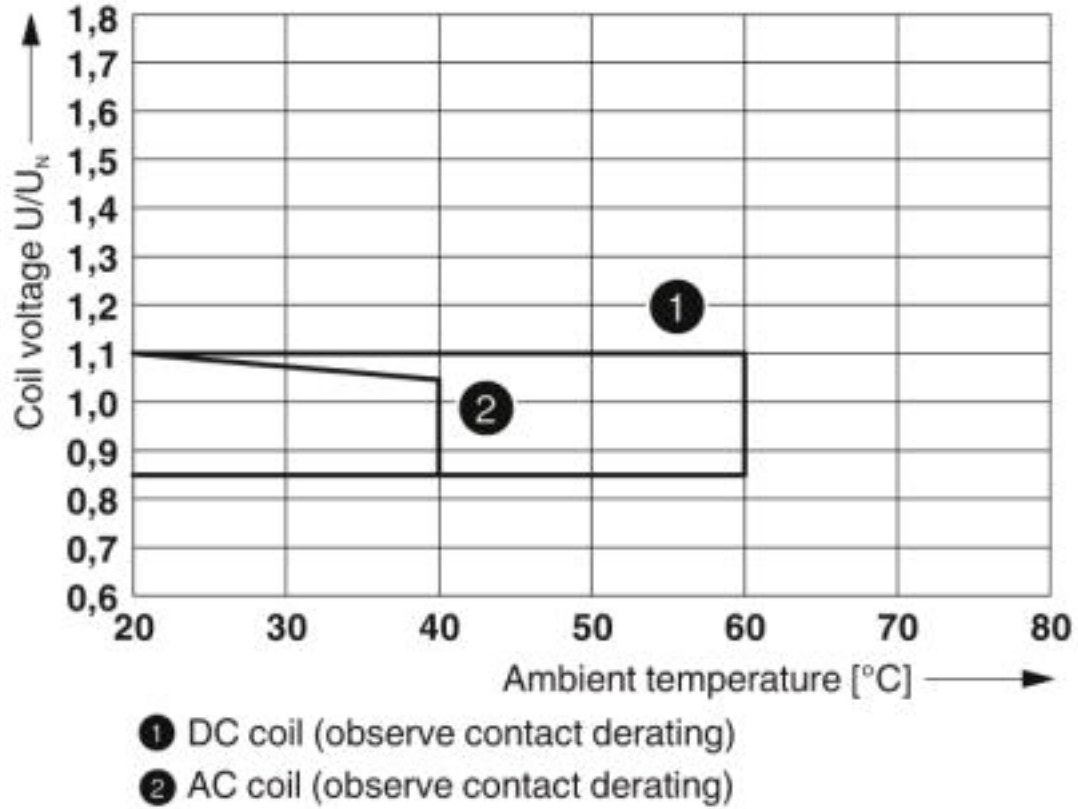

Operating voltage range

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276


Diagram

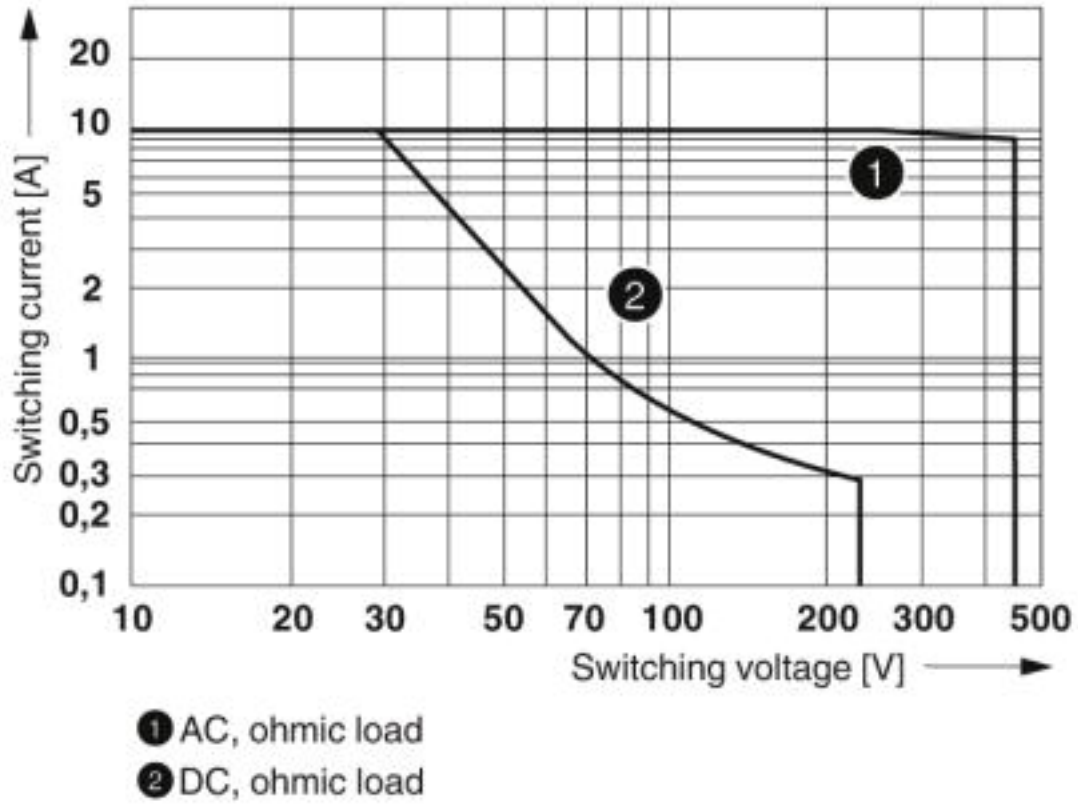

Interrupting rating

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276


Diagram

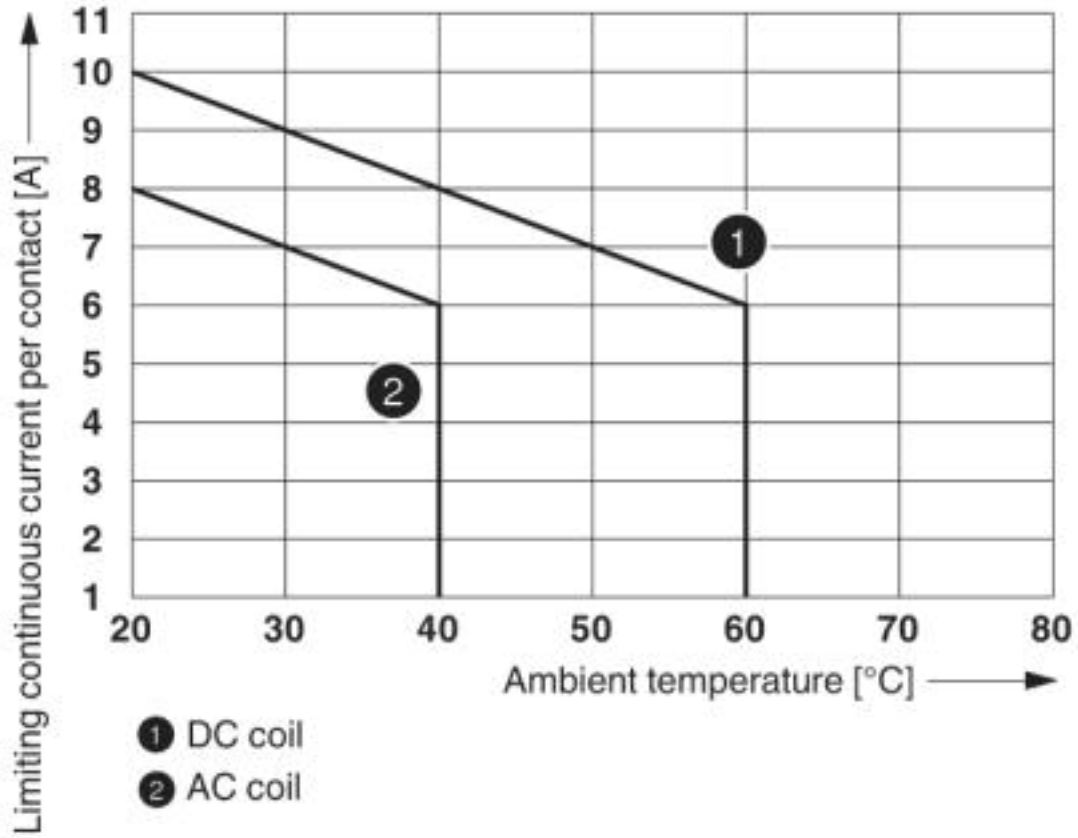

Contact derating

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276


Diagram

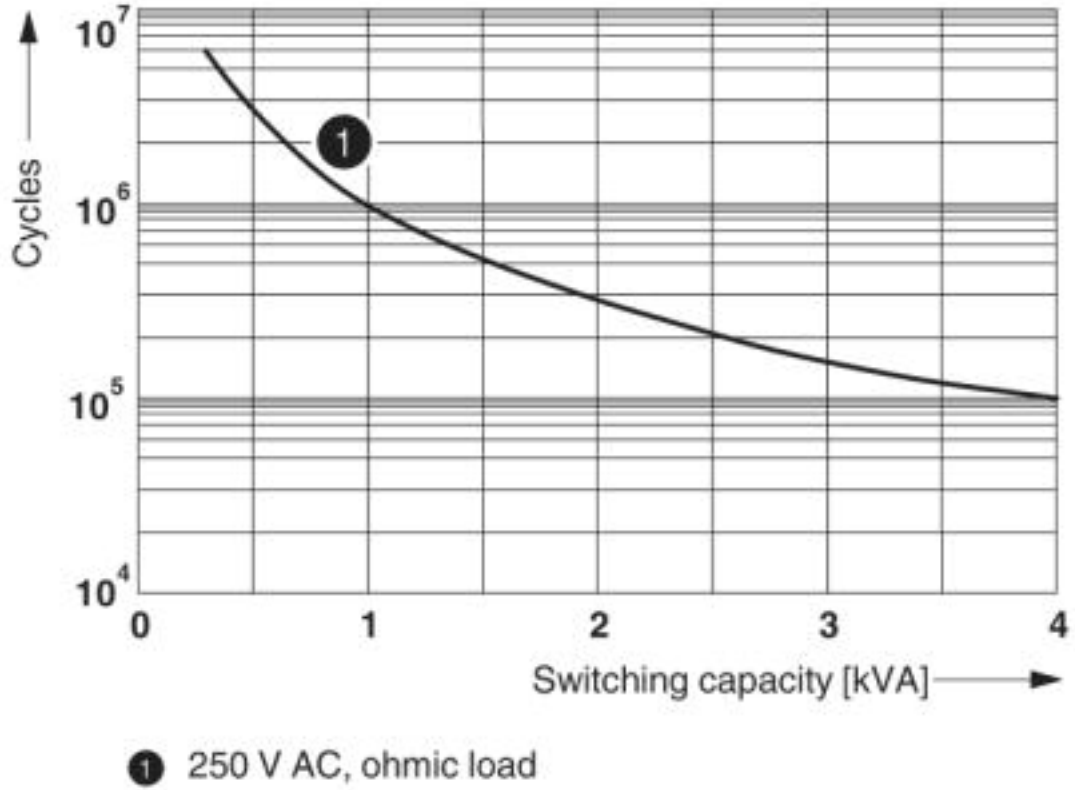

Electrical service life

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Diagram

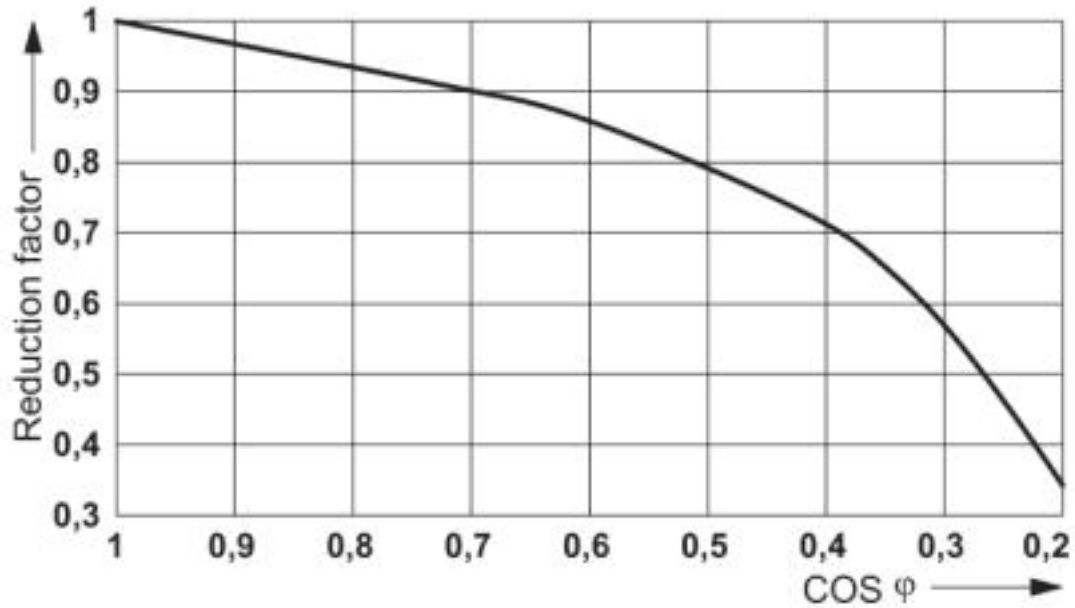

Service life reduction factor

Articles in set

Relay base - RIF-4-BPT/3X21 - 2900961



RIF-4... relay base, for high-power relay with 2 or 3 PDTs or 3 N/O contacts, Push-in connection, plug-in option for input/suppressor modules, for mounting on NS 35/7,5

Single relay - REL-PR3-230AC/3X21 - 2903705



Plug-in high-power relay with power contacts, 3 PDTs, coil voltage: 230 V AC

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Articles in set

Plug-in module - RIF-LV-120-230 AC/110 DC - 2900944



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor and yellow LED, input voltage: 120 ... 230 V AC/110 V DC $\pm 20\%$

Retaining bracket - RIF-RH-4 - 2900956



Relay retaining bracket, with holder for marking material, suitable for RIF-4 relay base, for high-power relay

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27371100 |
| eCl@ss 4.1 | 27371100 |
| eCl@ss 5.0 | 27371600 |
| eCl@ss 5.1 | 27371600 |
| eCl@ss 6.0 | 27371600 |
| eCl@ss 7.0 | 27371601 |
| eCl@ss 8.0 | 27371601 |
| eCl@ss 9.0 | 27371601 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001437 |
| ETIM 3.0 | EC001437 |
| ETIM 4.0 | EC001437 |
| ETIM 5.0 | EC001437 |
| ETIM 6.0 | EC001437 |
| ETIM 7.0 | EC001437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211916 |
| UNSPSC 7.0901 | 39121515 |
| UNSPSC 11 | 39121515 |

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Classifications

UNSPSC

| | |
|--------------|----------|
| UNSPSC 12.01 | 39121515 |
| UNSPSC 13.2 | 39122334 |
| UNSPSC 18.0 | 39122334 |
| UNSPSC 19.0 | 39122334 |
| UNSPSC 20.0 | 39122334 |
| UNSPSC 21.0 | 39122334 |

Approvals

Approvals

Approvals

DNV GL / CSA / PRS / LR / EAC / EAC

Ex Approvals

Approval details

| | | | |
|--------|--|---|-------------------|
| DNV GL | | https://approvalfinder.dnvgl.com/ | TAA000018V |
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 2607057 |
| PRS | | http://www.prs.pl/ | TE/2108/880590/16 |
| LR | | http://www.lr.org/en | 15/20011 |
| EAC | | | TR_TS_D_00573_c |

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Approvals

EAC



TR_TS_S_00010_c

Accessories

Accessories

End block

End clamp - CLIPFIX 35 - 3022218



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

Insulating sleeve, color: white



Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, color: red



Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, color: blue



Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Accessories

Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, color: yellow



Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, color: green



Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, color: gray



Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, color: black



Jumper

Plug-in bridge - FBS 2-6 - 3030336



Plug-in bridge, pitch: 6.2 mm, width: 10.7 mm, number of positions: 2, color: red

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Accessories

Plug-in bridge - FBS 2-6 BU - 3036932



Plug-in bridge, pitch: 6.2 mm, width: 10.7 mm, number of positions: 2, color: blue

Plug-in bridge - FBS 2-6 GY - 3032237



Plug-in bridge, pitch: 6.2 mm, width: 10.7 mm, number of positions: 2, color: gray

Marker carriers

Marker carriers - STP 5-2 - 0800967



Double marker carrier, snaps onto the double-level spring-cage terminal block STTB 2,5, STTB 4, PTTB 2,5, PTTB 4 can be marked with UC-TM 5, ZB 5 or UC-TMF 5, ZBF 5

Terminal marking

Zack marker strip - ZB 5 :UNBEDRUCKT - 1050004



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

Zack marker strip - ZB 15:UNBEDRUCKT - 0811972



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 15.2 mm, lettering field size: 10.5 x 15.1 mm, Number of individual labels: 5

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Accessories

Marker for terminal blocks - UC-TM 16 - 0819217



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 16 mm, lettering field size: 15.45 x 10.5 mm, Number of individual labels: 32

Marker for terminal blocks - UC-TMF 16 - 0819262



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 16 mm, lettering field size: 15.45 x 5.1 mm, Number of individual labels: 32

Test plug terminal block

Test plugs - MPS-MT - 0201744



Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

Spare parts

Relay base - RIF-4-BPT/3X21 - 2900961



RIF-4... relay base, for high-power relay with 2 or 3 PDTs or 3 N/O contacts, Push-in connection, plug-in option for input/suppressor modules, for mounting on NS 35/7,5

Relay Module - RIF-4-RPT-LV-230AC/3X21 - 2903276

Accessories

Single relay - REL-PR3-230AC/3X21 - 2903705



Plug-in high-power relay with power contacts, 3 PDTs, coil voltage: 230 V AC

Plug-in module - RIF-LV-120-230 AC/110 DC - 2900944



Plug-in module, for mounting on RIF-1, RIF-2, RIF-3, and RIF-4, with varistor and yellow LED, input voltage: 120 ... 230 V AC/110 V DC ± 20 %

Retaining bracket - RIF-RH-4 - 2900956



Relay retaining bracket, with holder for marking material, suitable for RIF-4 relay base, for high-power relay
