

## Type 2 surge protection device - VAL-US 60/O - 2906279

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge arresters consisting of base element and protective connector with high-capacity varistor, for mounting on NS 35/7.5, 1-channel


FM version shown

### Why buy this product

- ✓ Plug-in direction parallel to the conductor axis
- ✓ Versions with and without floating remote indication contact
- ✓ Rack-mount 2U panel applications
- ✓ Accepts Type 1 and Type 2 VAL-MS plugs.
- ✓ Coding when protective plug is inserted for the first time
- ✓ DIN rail mounting



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 063041
GTIN	4055626063041
Weight per Piece (excluding packing)	145.830 g
Custom tariff number	85363090
Country of origin	Germany

### Technical data

#### Dimensions

Height	77.1 mm
Width	17.6 mm

# Type 2 surge protection device - VAL-US 60/O - 2906279

## Technical data

### Dimensions

Depth	89.2 mm
-------	---------

### Ambient conditions

Degree of protection	IP20
	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	max. 2000 m
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	25g (half sinus / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (10 ... 500 Hz / 2.5 h / X, Y, Z)

### General

IEC test classification	II
	T2
EN type	T2
Mode of protection	L-PEN
	(L+) - (L-)
	(L-) - PE
	(L+) - PE
Mounting type	DIN rail: 35 mm
Color	black
Housing material	PBT
Degree of pollution	2
Flammability rating according to UL 94	V0
Design	DIN rail module, two-section, divisible
Number of positions	1
Surge protection fault message	optical

### Protective circuit

Nominal voltage $U_N$	60 V DC
	-48 V DC (RRH)
Nominal frequency $f_N$	50 Hz (60 Hz)
Maximum continuous voltage $U_C$	75 V AC
	100 V DC
Maximum continuous operating voltage $U_C$ (L-N)	75 V AC
	100 V DC
Maximum continuous operating voltage $U_C$ (L-PEN)	75 V AC
	100 V DC

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Technical data

#### Protective circuit

Rated load current $I_L$	80 A
Residual current $I_{PE}$	$\leq 0.45$ mA
Standby power consumption $P_C$	$\leq 35$ mVA
Nominal discharge current $I_n$ (8/20) $\mu$ s	15 kA
Nominal discharge current $I_n$ (8/20) $\mu$ s (L-N)	15 kA
Nominal discharge current $I_n$ (8/20) $\mu$ s (L-PEN)	15 kA
Maximum discharge current $I_{max}$ (8/20) $\mu$ s	40 kA
Maximum discharge current $I_{max}$ (8/20) $\mu$ s (L-N)	40 kA
Maximum discharge current $I_{max}$ (8/20) $\mu$ s (L-PEN)	40 kA
Short-circuit current rating $I_{SCCR}$	25 kA
Voltage protection level $U_p$	$\leq 0.55$ kV
Voltage protection level $U_p$ (L-N)	$\leq 0.55$ kV
Voltage protection level $U_p$ (L-PEN)	$\leq 0.55$ kV
Residual voltage $U_{res}$	$\leq 0.55$ kV (at $I_n$ )
	$\leq 0.425$ kV (at 10 kA)
	$\leq 0.325$ kV (at 5 kA)
	$\leq 0.275$ kV (at 3 kA)
TOV behavior at $U_T$	100 V AC (5 s / withstand mode)
TOV behavior at $U_T$ (L-N)	100 V AC (5 s / withstand mode)
TOV behavior at $U_T$ (L-PEN)	100 V AC (5 s / withstand mode)
Response time $t_A$	$\leq 25$ ns
Response time $t_A$ (L-N)	$\leq 25$ ns
Response time $t_A$ (L-PEN)	$\leq 25$ ns
Max. backup fuse with branch wiring	125 A AC (gG)
Max. backup fuse with V-type through wiring	80 A AC (gG)

#### Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	4.5 Nm
	30 lb <sub>F</sub> -in. (UL)
Stripping length	16 mm
Conductor cross section flexible min.	1.5 mm <sup>2</sup>
Conductor cross section flexible max.	25 mm <sup>2</sup>
Conductor cross section solid min.	1.5 mm <sup>2</sup>
Conductor cross section solid max.	35 mm <sup>2</sup>
Conductor cross section AWG	15 ... 2

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Technical data

#### Connection data

	10 ... 2 (UL)
Connection method	Screw connection
Screw thread	M5
Tightening torque	4.5 Nm
	30 lb <sub>F</sub> -in. (UL)
Stripping length	16 mm
Conductor cross section flexible min.	1.5 mm <sup>2</sup>
Conductor cross section flexible max.	25 mm <sup>2</sup>
Conductor cross section solid min.	1.5 mm <sup>2</sup>
Conductor cross section solid max.	35 mm <sup>2</sup>
Conductor cross section AWG	15 ... 2
	10 ... 2 (UL)

#### UL specifications

SPD Type	4CA
Maximum continuous operating voltage MCOV	75 V AC
Maximum continuous operating voltage MCOV (L-N)	75 V AC
Maximum continuous operating voltage MCOV (L-G)	75 V AC
Maximum continuous operating voltage MCOV (L+) - (L-)	100 V DC
Maximum continuous operating voltage MCOV (L+/L-) - G	100 V DC
Nominal voltage	60 V DC
Mode of protection	L-L
	L-G
	(L+) - (L-)
	(L+) - G
	(L-) - G
Power distribution system	1
Voltage protection rating VPR	500 V
Voltage protection rating VPR (L-N)	0.5 kV
Voltage protection rating VPR (L+) - (L-)	0.33 kV
Voltage protection rating VPR (L+/L-) -G	0.33 kV
Measured limiting voltage MLV	630 V
Measured limiting voltage MLV (L-N)	630 V
Nominal discharge current I <sub>n</sub>	10 kA
Nominal discharge current I <sub>n</sub> (L-N)	10 kA
Nominal discharge current I <sub>n</sub> (L+) - (L-)	10 kA
Nominal discharge current I <sub>n</sub> (L+/L-) - G	10 kA

# Type 2 surge protection device - VAL-US 60/O - 2906279


## Technical data

### UL connection data


Conductor cross section AWG	10 ... 2
Tightening torque	30 lb <sub>F</sub> -in.

## Drawings

Dimensional drawing

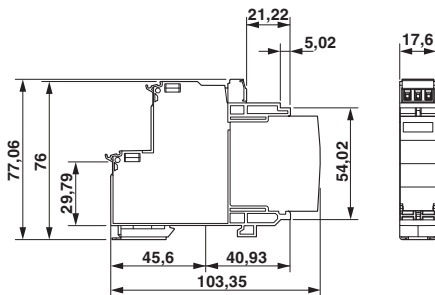

Circuit diagram



FM version shown

## Classifications

### eCl@ss

eCl@ss 5.1	27130801
eCl@ss 6.0	27130803
eCl@ss 8.0	27130805
eCl@ss 9.0	27130805

### ETIM

ETIM 5.0	EC000941
ETIM 6.0	EC000941

### UNSPSC

UNSPSC 13.2	39121620
-------------	----------

## Approvals

### Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Approvals

Ex Approvals

---

#### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 330181
---------------	--	---------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 330181
----------------	--	---------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	
------------------	--	---------------------------------------------------------------------------------------------------------------------------------------------------------	--

### Accessories

#### Accessories

##### Bridge

Wiring bridge - MPB 18/1- 2 - 2809209



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 2-pos.

---

Wiring bridge - MPB 18/1- 3 - 2809212



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 3-pos.

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

Wiring bridge - MPB 18/1- 4 - 2809225



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 4-pos.

---

Wiring bridge - MPB 18/1- 6 - 2748564



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 6-pos.

---

Wiring bridge - MPB 18/1- 7 BU - 2856278



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 7-pos., color: Blue

---

Wiring bridge - MPB 18/1- 8 BU - 2858470



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos., color: Blue

---

Wiring bridge - MPB 18/1- 8 - 2748577



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos.

---

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

Wiring bridge - MPB 18/1- 9 - 2748580



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 9-pos.

---

Wiring bridge - MPB 18/1-12 - 2748593



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 12-pos.

---

Wiring bridge - MPB 18/1-57 - 2809238



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 57-pos.

---

Wiring bridge - MPB 18/3- 6 - 2809241



Wiring bridge for modules with connecting pitch 17.5 mm, 3-phase, 6-pos.

---

Wiring bridge - MPB 18/4- 8 - 2809283



Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 8-pos.

---

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

Wiring bridge - MPB 18/4-12 - 2809296



Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 12-pos.

---

Wiring bridge - MPB F200X16/ 1GS - 2818339



Wiring bridge flexible, diameter 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 200 mm

---

Wiring bridge - MPB F400X16/ 1GS - 2818342



Wiring bridge flexible, diameter 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 400 mm

---

Wiring bridge - MPB F600X16/ 1GS - 2818355



Wiring bridge flexible, diameter: 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 600 mm

---

Wiring bridge - MPB F600X16/ 1GS - 2818355



Wiring bridge flexible, diameter: 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 600 mm

---

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

Wiring bridge - MPB F400X16/ 1GS - 2818342



Wiring bridge flexible, diameter 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 400 mm

---

Wiring bridge - MPB F200X16/ 1GS - 2818339



Wiring bridge flexible, diameter 16 mm<sup>2</sup>, with a fork-type cable lug on one side, length: 200 mm

---

Wiring bridge - MPB 18/1-10/1.0.0 - 2830443



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 10 pitches with contact sequence 1-0-0

---

Wiring bridge - MPB 18/4-12 - 2809296



Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 12-pos.

---

Wiring bridge - MPB 18/4- 8 - 2809283



Wiring bridge for modules with connecting pitch 17.5 mm, 4-phase, 8-pos.

---

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

Wiring bridge - MPB 18/3- 6 - 2809241



Wiring bridge for modules with connecting pitch 17.5 mm, 3-phase, 6-pos.

---

Wiring bridge - MPB 18/1-57 - 2809238



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 57-pos.

---

Wiring bridge - MPB 18/1-12 - 2748593



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 12-pos.

---

Wiring bridge - MPB 18/1- 9 - 2748580



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 9-pos.

---

Wiring bridge - MPB 18/1- 8 - 2748577



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 8-pos.

---

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

Wiring bridge - MPB 18/1- 6 - 2748564



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 6-pos.

---

Wiring bridge - MPB 18/1- 4 - 2809225



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 4-pos.

---

Wiring bridge - MPB 18/1- 3 - 2809212



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 3-pos.

---

Wiring bridge - MPB 18/1- 2 - 2809209



Wiring bridge for modules with connecting pitch 17.5 mm, 1-phase, 2-pos.

---

### Device marking

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, Mounting type: Snap into tall marker groove, for terminal block width: 18 mm, Lettering field: 18 x 5 mm

---

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

#### Feed-through terminal block

Feed-through terminal block - DK-BIC-35 - 2749880



Feed-through terminal block for VAL and FLT applications

---

#### Labeled device marker

Marker for terminal blocks - ZBN 18,LGS:ERDE - 2749589



Marker for terminal blocks, Strip, white, labeled, Horizontal: Grounding symbol, Mounting type: Snap into tall marker groove, for terminal block width: 18 mm, Lettering field: 18 x 5 mm

---

Marker for terminal blocks - ZBN 18,LGS:L1-N,ERDE - 2749576



Marker for terminal blocks, Strip, white, labeled, Horizontal: L1, L2, L3, N, GND, Mounting type: Snap into tall marker groove, for terminal block width: 18 mm, Lettering field: 18 x 5 mm

---

#### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

#### Spare parts

## Type 2 surge protection device - VAL-US 60/O - 2906279

### Accessories

Type 2 surge protection base element - VAL-MS-T1/T2 BE/O-FM - 2905652



Base element for type 1/2 arresters from the VALVETRAB MS T1/T2 product range, with remote indication contact.  
Version: 1-channel