

## Setpoint adjuster - EMG 30-SP- 4K7LIN - 2940252

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Setpoint value potentiometer, to set setpoints individually, resistance value 4,7 kΩ

### Your advantages

- For direct setpoint definition in combination with a constant voltage source



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 079956
GTIN	4017918079956
Weight per Piece (excluding packing)	57.660 g
Custom tariff number	85334010
Country of origin	Germany

### Technical data

#### Dimensions

Width	30 mm
Height	75 mm
Depth	68 mm

#### Ambient conditions

Ambient temperature (operation)	0 °C ... 40 °C
---------------------------------	----------------

#### Input data

Potentiometer	4.7 kΩ
Resistance tolerance	±20 %

# Setpoint adjuster - EMG 30-SP- 4K7LIN - 2940252

## Technical data

### Input data

Potentiometer, current-carrying capacity	0.5 W
--	-------

### General


Mounting position	any
Housing material	Polycarbonate fiber reinforced PC-F
Color	green

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


## Drawings

Dimensional drawing

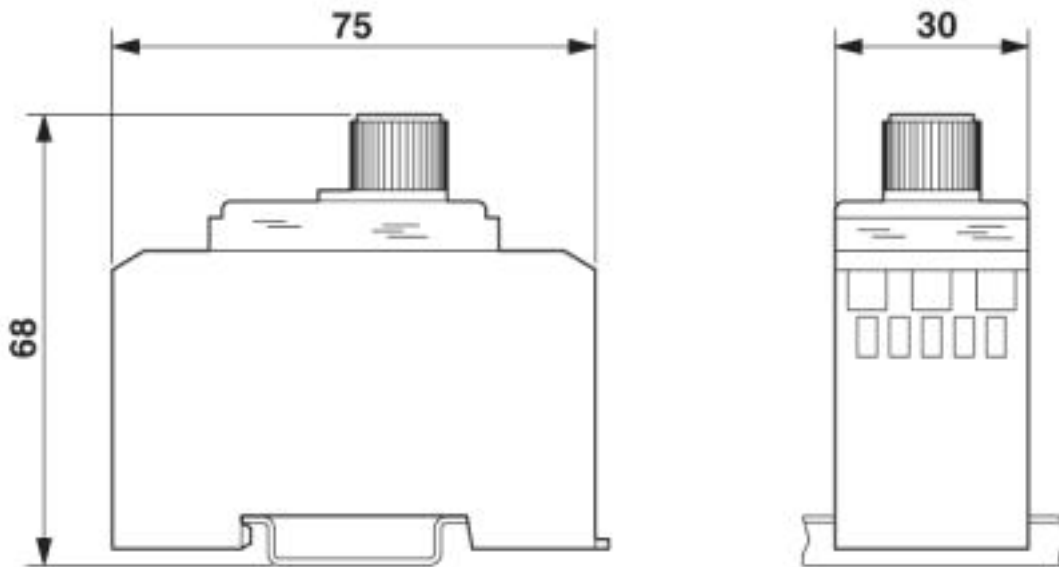

# Setpoint adjuster - EMG 30-SP- 4K7LIN - 2940252

Circuit diagram

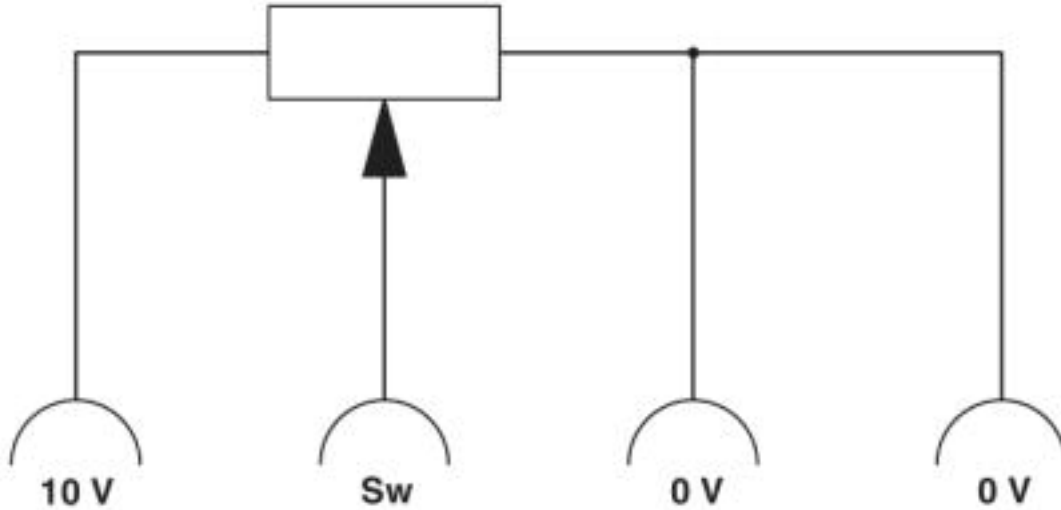

## Classifications

### eCl@ss

eCl@ss 4.0	27271100
eCl@ss 4.1	27200300
eCl@ss 5.0	27371200
eCl@ss 5.1	27200300
eCl@ss 6.0	27371200
eCl@ss 7.0	27371227
eCl@ss 8.0	27371227
eCl@ss 9.0	27371227

### ETIM

ETIM 4.0	EC001027
ETIM 5.0	EC001027
ETIM 6.0	EC001027
ETIM 7.0	EC001027

### UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	41113633

## Setpoint adjuster - EMG 30-SP- 4K7LIN - 2940252

Approvals

Approvals

---

Approvals


EAC

---

Ex Approvals

---

Approval details

EAC		RU C- DE.A*30.B.01082
-----	---	--------------------------

---