

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




COMBI receptacle, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, color: gray, mounting type: NS 35/7,5, NS 35/15

Your advantages

- Standard strain relief can be used
- The coupling with spring-cage connection offers the ideal solution for applications with DIN rail mounting where only a low design height is available
- Tested for railway applications

COMPLIANT

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
GTIN	 4 017918 960506
GTIN	4017918960506
Weight per Piece (excluding packing)	4.410 g
Custom tariff number	85366990
Country of origin	Poland

Technical data

General

Number of levels	1
Number of connections	1
Nominal cross section	2.5 mm ²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Technical data

General

Area of application	Railway industry
	Machine building
	Plant engineering
Rated surge voltage	6 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Maximum power dissipation for nominal condition	0.77 W
Maximum load current	24 A (with 4 mm ² conductor cross section)
Nominal current I _N	24 A
Nominal voltage U _N	500 V
Open side panel	No
Insertion/withdrawal cycles mechanical	100
Result of surge voltage test	Test passed
Surge voltage test setpoint	7.3 kV
Result of power-frequency withstand voltage test	Test passed
Power frequency withstand voltage setpoint	1.89 kV
Result of tight fit on support	Test passed
Tight fit on carrier	NS 35
Setpoint	1 N
Short circuit stability result	Test passed
Conductor cross section short circuit testing	2.5 mm ²
Short-time current	0.3 kA
Result of thermal test	Test passed
Proof of thermal characteristics (needle flame) effective duration	30 s
Oscillation, broadband noise test result	Test passed
Test specification, oscillation, broadband noise	DIN EN 50155 (VDE 0115-200):2008-03
Test spectrum	Service life test category 1, class B, body mounted
Test frequency	f ₁ = 5 Hz to f ₂ = 150 Hz
ASD level	0.964 (m/s ²) ² /Hz
Acceleration	0.58 g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Shock test result	Test passed
Test specification, shock test	DIN EN 50155 (VDE 0115-200):2008-03
Shock form	Half-sine
Acceleration	5g

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Technical data

General

Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Static insulating material application in cold	-60 °C
Behavior in fire for rail vehicles (DIN 5510-2)	Test passed
Flame test method (DIN EN 60695-11-10)	V0
Oxygen index (DIN EN ISO 4589-2)	>32 %
NF F16-101, NF F10-102 Class I	2
NF F16-101, NF F10-102 Class F	2
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

Dimensions

Width	5.2 mm
End cover width	2.2 mm
Length	43.5 mm
Height NS 35/7,5	34 mm
Height NS 35/15	41.5 mm
Height NS 15	34 mm
Pitch	5.2 mm

Connection data

Connection method	Spring-cage connection
Stripping length	8 mm ... 10 mm
Connection in acc. with standard	IEC 61984
Conductor cross section solid min.	0.08 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG min.	28
Conductor cross section AWG max.	12
Conductor cross section flexible min.	0.08 mm ²

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Technical data

Connection data

Conductor cross section flexible max.	2.5 mm ²
Min. AWG conductor cross section, flexible	28
Max. AWG conductor cross section, flexible	14
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.14 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.14 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	0.5 mm ²
Internal cylindrical gage	A3

Standards and Regulations

Connection in acc. with standard	CUL
	IEC 61984
Flammability rating according to UL 94	V0
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Diagram

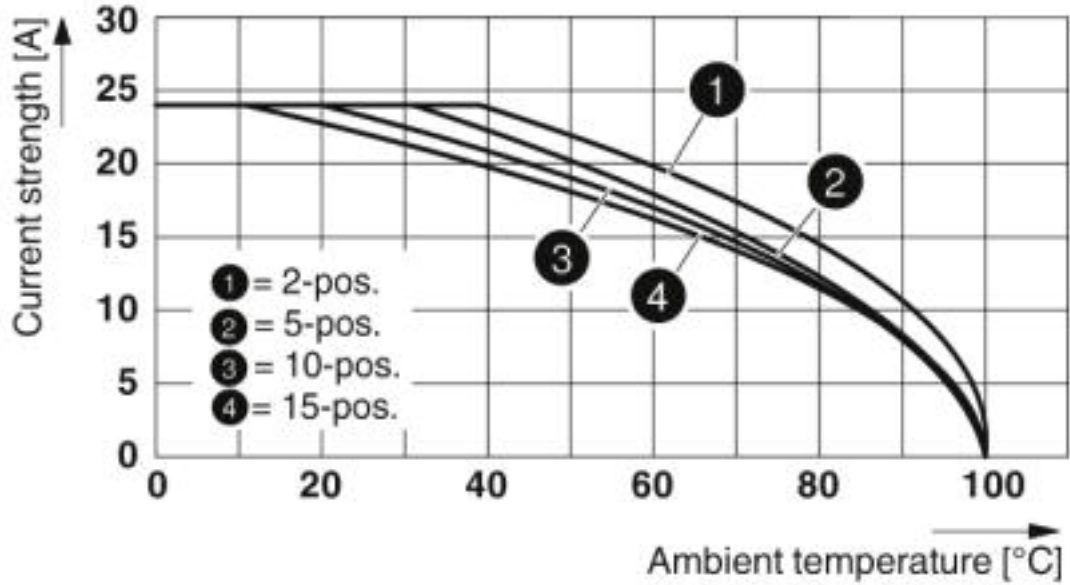

Circuit diagram



Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27141100
eCl@ss 7.0	27141151
eCl@ss 8.0	27141151
eCl@ss 9.0	27141151

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Classifications

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC002021
ETIM 6.0	EC002021
ETIM 7.0	EC002021

UNSPSC

UNSPSC 6.01	30211802
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

Approvals

Approvals


Approvals

DNV GL / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approval details

DNV GL		https://approvalfinder.dnvgl.com/	TAE00001CS
--------	---	---	------------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	C	
Nominal voltage UN	300 V	300 V	
Nominal current IN	20 A	20 A	
mm ² /AWG/kcmil	28-12	28-12	

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Approvals

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	C	
Nominal voltage UN	300 V	300 V	
Nominal current IN	20 A	20 A	
mm²/AWG/kcmil	28-12	28-12	

EAC		EAC-Zulassung
-----	--	---------------

EAC		RU C-DE.A*30.B.01742
-----	--	----------------------

cULus Recognized	
------------------	--

Accessories

Accessories

Coding element

Coding star - PC - 3040588



Coding star, length: 3 mm, width: 3 mm, height: 6 mm, color: red

DIN rail

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM - 1204122



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Aluminum, uncoated, length: 2000 mm, color: silver

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM - 0801762



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored

End cap - NS 35/ 7,5 CAP - 1206560



DIN rail end piece, for DIN rail NS 35/7.5

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM - 1204135



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Aluminum, uncoated, length: 2000 mm, color: silver

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, length: 2000 mm, color: silver

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored

End cap - NS 35/15 CAP - 1206573



DIN rail end piece, for DIN rail NS 35/15

End block

End clamp - E/AL-NS 35 - 1201662



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

End cover

End cover - D-SC 2,5 - 3042243



End cover, length: 18.8 mm, width: 2.2 mm, height: 37.2 mm, color: gray

Insulating sleeve

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Insulating sleeve - MPS-IH WH - 0201663

Insulating sleeve, color: white



Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, color: red



Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, color: blue



Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, color: yellow



Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, color: green



COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, color: gray



Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, color: black



Insulating sleeve - ISH 2,5/0,2 - 3002843

Insulating sleeve, color: white



Insulating sleeve - ISH 2,5/0,5 - 3002856

Insulating sleeve, color: gray



Insulating sleeve - ISH 2,5/1,0 - 3002869

Insulating sleeve, color: black



Labeled terminal marker

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Zack Marker strip, flat - ZBF 5 CUS - 0825025



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Marker for terminal blocks - UC-TMF 5 CUS - 0824638



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm

Marker for terminal blocks - UCT-TMF 5 CUS - 0829658



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm

Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

Mounting material

Strain relief - PDZ/2 - 3040562



Strain relief, length: 28.9 mm, width: 9.6 mm, number of positions: 2, color: black

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Strain relief - PDZ/4 - 3040575



Strain relief, length: 28.9 mm, width: 19.8 mm, number of positions: 4, color: black

Partition plate

Spacer plate - DP PS-5 - 3036725



Spacer plate, length: 22.4 mm, width: 5.2 mm, height: 29 mm, number of positions: 1, color: red

Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Screwdriver - ST-BW - 1207608



Actuation tool, for all 2.5 mm² - 4.0 mm² spring-cages

Terminal marking

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 5.1 x 5.2 mm

Marker for terminal blocks - UC-TMF 5 - 0818153



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 5.1 mm

Marker for terminal blocks - UCT-TMF 5 - 0828744



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into flat marker groove, for terminal block width: 5.2 mm, lettering field size: 4.4 x 4.7 mm

Test plug terminal block

Test plugs - MPS-MT - 0201744



Test plugs, with solder connection up to 1 mm² conductor cross section, color: gray

Test plugs - PS-5 - 3030983



Test plugs, color: red

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Test plugs - PS-5/2,3MM RD - 3038723



Test plugs, color: red

Additional products

Plug - SP 2,5/ 1 - 3040258



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 2 - 3040261



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 3 - 3040274



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 4 - 3040287



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP 2,5/ 5 - 3040290



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 6 - 3040300



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 7 - 3040313



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 8 - 3040326



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 9 - 3040339



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP 2,5/10 - 3040342



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

Plug - SP 2,5/11 - 3040355



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Plug - SP 2,5/12 - 3040368



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

Plug - SP 2,5/13 - 3040371



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

Plug - SP 2,5/14 - 3040384



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP 2,5/15 - 3040397



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

Plug - SP 2,5/ 1 BU - 3040698



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP 2,5/ 1 GNYE - 3040708



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SPB 2,5/ 1 - 3040106



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 2 - 3040119



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPB 2,5/ 3 - 3040122



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 4 - 3040135



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 5 - 3040143



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 6 - 3040151



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 7 - 3040164



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPB 2,5/ 8 - 3040177



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 9 - 3040180



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

Plug - SPB 2,5/10 - 3040193



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

Plug - SPB 2,5/11 - 3040203



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Plug - SPB 2,5/12 - 3040216



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPB 2,5/13 - 3040229



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

Plug - SPB 2,5/14 - 3040232



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

Plug - SPB 2,5/15 - 3040245



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

Plug - SPB 2,5/ 1 BU - 3040724



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SPB 2,5/ 1 GNYE - 3040711



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPDB 2,5/ 1 - 3040407



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 2 - 3040410



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 3 - 3040423



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 4 - 3040436



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 5 - 3040449



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPDB 2,5/ 6 - 3040452



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 7 - 3040465



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 8 - 3040478



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/ 9 - 3040481



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/10 - 3040494



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPDB 2,5/11 - 3040504



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/12 - 3040517



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/13 - 3040520



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/14 - 3040533



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

Plug - SPDB 2,5/15 - 3040546



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPDB 2,5/ 1 BU - 3040737



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SPDB 2,5/ 1 GNYE - 3040740



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SP-H 2,5/ 1 - 3210619



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 2 - 3210622



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 3 - 3210635



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP-H 2,5/ 4 - 3210648



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 5 - 3210651



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 6 - 3210664



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 7 - 3210677



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 8 - 3210680



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP-H 2,5/ 9 - 3210693



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/10 - 3210703



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/11 - 3210716



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/12 - 3210729



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/13 - 3210732



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP-H 2,5/14 - 3210745



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/15 - 3210758



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 1 BU - 3210761



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP-H 2,5/ 1 GNYE - 3210774



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SP-H 2,5/ 1-L - 3210787



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP-H 2,5/ 1-L BU - 3210790



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP-H 2,5/ 1-L GNYE - 3210800



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SP-H 2,5/ 1-M - 3210813



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 1-M BU - 3210826



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP-H 2,5/ 1-M GNYE - 3210839



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SP-H 2,5/ 1-R - 3210842



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: gray

Plug - SP-H 2,5/ 1-R BU - 3210855



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: blue

Plug - SP-H 2,5/ 1-R GNYE - 3210868



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, Plug connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 39 mm, color: green-yellow

Plug - SPV 2,5/ 1 - 3041710



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 2 - 3041723



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 2, number of positions: 2, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 10.4 mm, height: 34 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPV 2,5/ 3 - 3041736



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 3, number of positions: 3, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 15.6 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 4 - 3041749



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 4, number of positions: 4, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 20.8 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 5 - 3041752



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 5, number of positions: 5, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 26 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 6 - 3041765



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 6, number of positions: 6, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 31.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 7 - 3041778



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 7, number of positions: 7, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 36.4 mm, height: 34 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPV 2,5/ 8 - 3041781



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 8, number of positions: 8, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 41.6 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 9 - 3041794



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 9, number of positions: 9, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 46.8 mm, height: 34 mm, color: gray

Plug - SPV 2,5/10 - 3041804



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 10, number of positions: 10, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 52 mm, height: 34 mm, color: gray

Plug - SPV 2,5/11 - 3041817



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 11, number of positions: 11, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 57.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/12 - 3041820



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 12, number of positions: 12, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 62.4 mm, height: 34 mm, color: gray

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPV 2,5/13 - 3041833



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 13, number of positions: 13, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 67.6 mm, height: 34 mm, color: gray

Plug - SPV 2,5/14 - 3041846



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 14, number of positions: 14, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 72.8 mm, height: 34 mm, color: gray

Plug - SPV 2,5/15 - 3041859



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 15, number of positions: 15, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 78 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 1 BU - 3061017



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

Plug - SPV 2,5/ 1 GNYE - 3061020



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPV 2,5/ 1-L - 3041024



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 1-L BU - 3041037



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

Plug - SPV 2,5/ 1-L GNYE - 3041040



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow

Plug - SPV 2,5/ 1-M - 3041053



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 1-M BU - 3041066



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

COMBI receptacle - SC 2,5-NS/ 1-L - 3042340

Accessories

Plug - SPV 2,5/ 1-M GNYE - 3041079



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow

Plug - SPV 2,5/ 1-R - 3041082



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: gray

Plug - SPV 2,5/ 1-R BU - 3041095



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: blue

Plug - SPV 2,5/ 1-R GNYE - 3041105



Plug, nom. voltage: 500 V, nominal current: 24 A, connection method: Spring-cage connection, number of connections: 1, number of positions: 1, cross section: 0.08 mm² - 4 mm², AWG: 28 - 12, width: 5.2 mm, height: 34 mm, color: green-yellow
