

## Socket - SD-US/SC/LA/GY - 2963860


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Control cabinet socket, for mounting on DIN rails and in the service interface, with LED, housing color: gray, with screw connection, national version: USA, housing width 45 mm



### Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 859138

### Technical data

#### Dimensions

Width	45 mm
Height	75 mm
Depth	70.5 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C

#### General

Nominal voltage $U_N$	125 V AC
Nominal current $I_N$	15 A
Status display	Glow lamp or LED with preresistor
Contact material	CuZn37
For country-specific use in	USA
Color	gray
Insulating material	PA
Standards/regulations	IEC 83
	DIN 49440-1

# Socket - SD-US/SC/LA/GY - 2963860

## Technical data

### General

	UL 498
	NEMA 5-15

### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	30
Conductor cross section AWG max.	12
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3

### Standards and Regulations

Standards/regulations	IEC 83
	DIN 49440-1
	UL 498
	NEMA 5-15

## Classifications

### eCl@ss

eCl@ss 4.0	27142305
eCl@ss 4.1	27142305
eCl@ss 5.0	27142305
eCl@ss 5.1	27142305
eCl@ss 6.0	27142305
eCl@ss 7.0	27142305
eCl@ss 8.0	27142305

### ETIM

ETIM 2.0	EC001325
ETIM 3.0	EC001325
ETIM 4.0	EC001663
ETIM 5.0	EC001663

### UNSPSC

UNSPSC 6.01	30211806
UNSPSC 7.0901	39121406
UNSPSC 11	39121406
UNSPSC 12.01	39121406

# Socket - SD-US/SC/LA/GY - 2963860

## Classifications

UNSPSC

UNSPSC 13.2	39121406
-------------	----------

## Approvals

Approvals

---

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

---

Ex Approvals

---

Approvals submitted

---

## Approval details

UL Listed


cUL Listed

EAC

cULus Listed

## Drawings

Circuit diagram

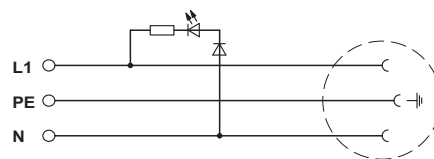

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>