


PANDUIT PART NUMBER	MILITARY PART NO. AND CLASS	STUD SIZE	DIMENSIONS in.				
			A $\pm .04$ (1.0)	C ^{MIN}	H $\pm .01$ (.3)	M $\pm .04$ (1.0)	W $\pm .01$ (.3)
PNF10-6R-2K	MS25036-111 CLASS 2	#6	1.06 (26.9)	.31 (7.9)	.15 (3.8)	.88 (22.3)	.38 (9.7)
PNF10-8R-2K	MS25036-156 CLASS 2	#8	1.06 (26.9)	.31 (7.9)	.17 (4.3)	.88 (22.3)	.38 (9.7)
PNF10-10R-2K	MS25036-112 CLASS 2	#10	1.06 (26.9)	.31 (7.9)	.20 (5.1)	.88 (22.3)	.38 (9.7)
PNF10-14R-2K	MS25036-157 CLASS 2	1/4"	1.21 (30.7)	.38 (9.7)	.27 (6.9)	.95 (24.1)	.52 (13.2)
PNF10-56R-2K	MS25036-113 CLASS 2	5/16"	1.21 (30.7)	.38 (9.7)	.33 (8.4)	.95 (24.1)	.52 (13.2)
PNF10-38R-2K	MS25036-114 CLASS 2	3/8"	1.29 (32.8)	.43 (10.9)	.39 (9.9)	1.00 (25.4)	.58 (14.7)

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - 600V. MAX. VOLTAGE RATING
(1000V. MAX. IN SIGNS, FIXTURES & LUMINARIES)
 - 221°F. (105°C) MAX. TEMP. RATING
 - #12-10 AWG (2.5-6.0 mm²) SOLID OR STRANDED COPPER WIRE
- MATERIAL:
 - STAMPING- .04" (1.02) THK. COPPER, TIN PLATED
 - HOUSING- NYLON, YELLOW
 - SLEEVE- BRASS, TIN PLATED
- WIRE STRIP LENGTH- 11/32" +1/32, -0 (8.7, +.8, -0)
- PACKAGE QUANTITY: -2K = 2000 PCS.
- DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS
- INSTALLATION TOOLS:
 - PRESSES - CP-851, CP-860, CP-861
 - APPLICATOR - CA-800, CA9
 - DIE INSERTS - CD-800-3, CD9-3B

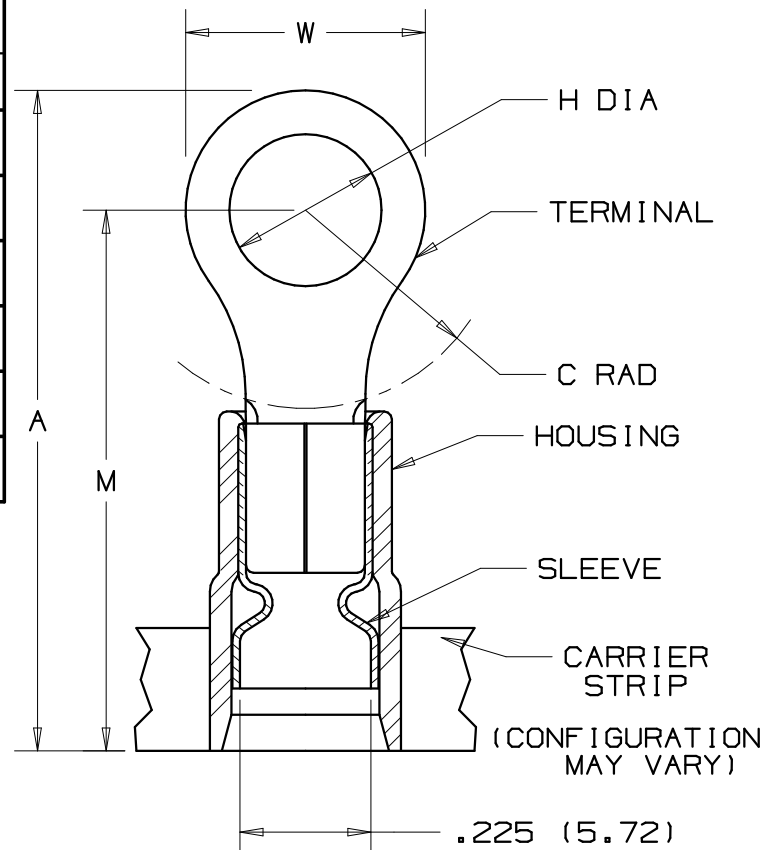


MAX WIRE
INSUL DIA
.135 (3.43)
MIN. WIRE
INSUL. DIA.



LISTED
587H
E52164



CERTIFIED
LR31212



Panduit part numbers shown on this drawing meet the material requirements of RoHS (EUROPEAN DIRECTIVES 2002/95/EC) as proposed by the Technical Adaptation Committee.

A41143_06

06	8/06	DAW	DAW	ADDED MILITARY PART NO. & CLASS	TR00155		LCA	TRO	P PANDUIT CORP. TINLEY PARK, ILLINOIS			
05	12/00	ED	SKB	FILESPEC WAS: N41143AA_PCD_04	08925		JAC	CCH				
04	5/99	ED		UPDATED "A" & "M" DIM.S, AND MODIFIED DIMENSIONAL TOLERANCES	07670							
03	1/97	JAMB	RLS	ADDED DIM.& MIN. WIRE INSUL. DIA.	05443		LA	DBH				
REV	DATE	BY	CHK	DESCRIPTION	ECN	QA	CUST	PM	DRAWN BY FES	CHK'D FS	SCALE NONE	DRAWING NO. A41143