


Search Results

- Evaluate
 - FAQ's
- Design a Solution
 - Part Drawings
 - DWG-ONE POSITION
 - DXF-ONE POSITION
 - PDFONE POSITION
 - Specification Sheets
 - PDFMiniCom Sur..
- How to Buy
 - Bill of Material
 - Favorite Products List
 - Locate Distributor
- Install & Maintain
 - Installation Instructions
 - PDFMiniCom Shu..


Home > Products Overview > Search Results >

Current refinements (click  to remove) Search Tips


 Text Search: 'CBXS1AW-A'

Your search criteria matched only one product, shown below

CBXS1AW-A

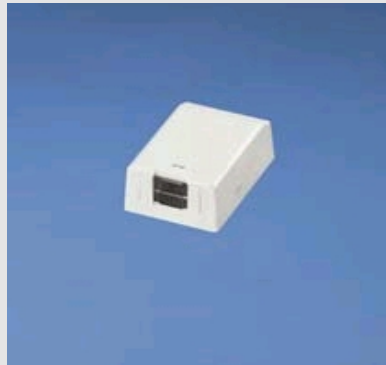

- Accept Mini-Com® Modules for STP and UTP, FJ® Fiber Optic Jack Modules and other flush modules, which snap in and out for easy moves, adds, and changes
 - Clear shuttered doors are spring -loaded to stay closed to prevent dust from entering module opening; doors can be collapsed to insert plug into module
 - Cable entry from side, rear, and base knockouts
 - Mount easily with supplied mounting screws, adhesive tape, or optional magnet (CSBM -X)
 - Optional icons available
 - Optional adhesive labels available
- *Raceway does not enter box.

Part Number	CBXS1AW-A
RoHS Compliancy Status	Compliant
Part Description	Shuttered surface mount box accepts one Mini-Com® Module.0.62"H x 1.64"W x 2.47"L (15.75mm x 41.66mm x 62.73mm)
Product Type	Shuttered Surface Mount Box
Color	Arctic White
Height (In.)	2.47
Height (mm)	62.7
Width (In.)	1.64
Width (mm)	41.6
CE Compliant	No
No. of Module Spaces	1
Pricing Description	Surface Mount Box, 1 Port, Shuttered, Arctic White
Thickness (In.)	0.62
Thickness (mm)	15.7
Used with Pan-Way Raceway	LD5/LDP5*
Min. Order UOM	PC
Min. Order Qty.	1
BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
Add to Favorite Product List	

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.