

Search Results

- Evaluate
 - FAQ's
- Design a Solution
 - Catalog Cut Sheet
 - PDFGJS660U Prod
 - Part Drawings
 - PDFEquipment Ju.
 - Specification Sheets
 - PDFTelecommunic..
- How to Buy
 - Bill of Material
 - Favorite Products List
 - Locate Distributor
- Install & Maintain
 - Installation Instructions
 - PDFTelecom Grou..
 - MSDS Sheets
 - PDFMaterial Saf..


Home > Products Overview > Search Results >

Current refinements (click to remove) Search Tips

Text Search: 'GJS660U'

Your search criteria matched only one product, shown below

GJS660U

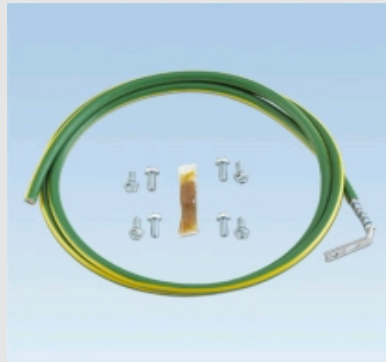

- Bond network equipment to grounding strip or grounding busbar
- Jumper kit available with both ends factory terminated to provide a bolt -on solution
- Jumper kit available with one end factory terminated to attach to the grounding strip or grounding busbar; free end accommodates unique equipment terminations
- Use jumpers with 90° bent lug, on grounding strip side, for high density grounding requirements up to one ground point per RU
- Use jumpers with 45° bent lugs, on grounding strip side, for improved cable management
- Use 24" jumpers when network equipment ground point is located near the grounding strip side of the rack or cabinet
- Use 36" jumpers when network equipment ground point is located away from the grounding strip side of the rack
- Engineered to comply with US and International grounding requirements

Part Number	GJS660U
RoHS Compliancy Status	Compliant
Part Description	#6 AWG green wire with yellow horizontal stripe. Jumper is pre-terminated on one end with LCC6-14JAW-L.
Length (In.)	60
Length (m)	1.52
Angle	Straight
CE Compliant	No
Pricing Description	Jumper Kits, Equipment Grounding, #6 AWG (16mm) Jumper; Factory Terminated One End
Min. Order UOM	KT
Min. Order Qty.	1
BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
Add to Favorite Product List	<input type="button" value="e"/>

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.