

Search Results

Evaluate

- Advertisements
- PDF-Setting the
- FAQ's
- Product Bulletins
- PDFType NNC- H ..

Design a Solution

- Part Drawings
- DWG-Type NNC-Ha ..
- PDFType NNC-Ha ..
- DXF-Type NNC-Ha ..

How to Buy

- Bill of Material
- Favorite Products List
- Locate Distributor


Home > Products Overview > Search Results >

Current refinements (click  to remove) Search Tips  Within Results

 Text Search: 'NNC25X75WH2'

Your search criteria matched only one product, shown below

NNC25X75WH2

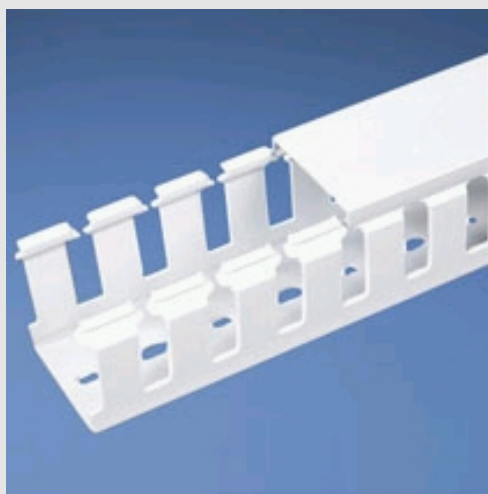


Specifications

- Made of halogen free modified PPO material and verified with IEC 60754 -2 test method (test on gases evolved during combustion of electric cabling)
- UL Recognized continuous use temperature: 203°F (95°C)
- UL94 Flammability Rating of V -0
- Provided with DIN 43 659 mounting holes
- Metric sizing and finger progression
- Duct and cover packaged together in 2 meter lengths
- Conforms with NFPA 79 -2002 section 14.3.1 requirement for flame retardant material

Features and Benefits

- Halogen free material eliminates safety and environmental concerns associated with halogenated materials
 - UL94V-0 material is self -extinguishing and exhibits the highest flame retardance meeting more electrical panel applications
 - Halogen free non -slip cover liner allows the cover to stay in place during shipment, vibration and when in a vertical orientation, eliminating rework
 - DIN 43 659 mounting hole pattern meets European standards for use in cabinet applications
 - PANDUIT® exclusive rounded edges protects hands and wiring/cabling from abrasion
 - Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
 - Double restricted slot design retains wire in slot for fast, easy wire installation or removal
- DO NOT allow cutting, tapping or cleaning fluids that contain hydrocarbons to come in contact with Type NNC Wiring Duct as it will cause stress cracking.

Base and cover sold together.

Part Number	NNC25X75WH2
RoHS Compliancy Status	Compliant
Part Description	Halogen Free Wiring Duct.
Material	Halogen- free Modified PPO
Color	White
UL Recognized (File No. E147128)	Yes
Length (ft.)	6.56
Length (m)	2
CE Marking	Yes
Duct Size W x H (In.)	.97 x 2.85
Duct Size W x H (mm)	24.6 x 72.4
Mounting Method	DIN Mounting Holes
Pricing Description	Slotted Duct, Halogen Free,25mm X 75mm X 2M,White
Cover Part Number	NC25WH2
Min. Order UOM	MR
Min. Order Qty.	20
BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
Add to Favorite Product List	

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.