Field Side Connection Module

0 ... 230 V AC/DC

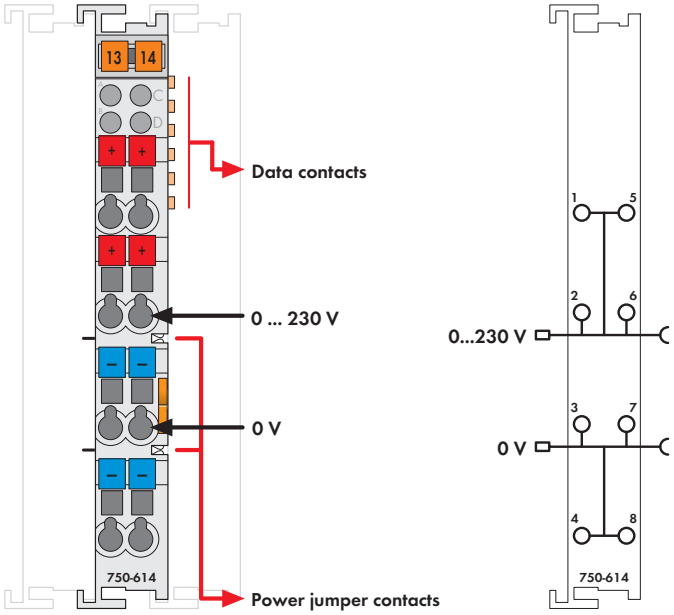

Fig. 750 Series/Technical data see page 24/Delivered without miniature WSB markers
750/753 Series marking see pages 10 ... 11 / 12 ... 13

Field side connection module for multiple tapping of the supply voltage.

This eliminates the need for additional terminal blocks.

Description	Item No.	Pack. Unit
Field Side Connection	**750-614**	10[1]
Field Side Connection (without connector)	**753-614**	10[1]

[1] Also available individually

Accessories		Item No.	Pack. Unit
	753 Series Connectors	**753-110**	25
	Coding elements	**753-150**	100
	Miniature WSB Quick marking system		
	plain	**248-501**	5
	with marking	see pages 352 ... 353	

Approvals	Also see "Approvals Overview" in Section 1	
Conformity marking	CE	
Shipbuilding	ABS, BV, DNV, GL, KR, LR*, NKK*, PRS*, RINA*	
	*753 Series, pending	
cULus UL 508		
cULus ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
Ex EN 60079-0, -15	I M2 / II 3 GD Ex nA IIC T4	753-614
EN 61241-0, -1		
Ex EN 60079-0, -11, -15	I M2 Ex d I	750-614*
EN 61241-0, -1, -11	II 3 G Ex nA IIC T4	750-614*
	II 3 D Ex tD A22 IP6X T135°C	750-614*
	* Permissible operating temperature: 0 °C ...	

Technical Data	
Voltage via power jumper contacts (max.)	0 V ... 230 V AC/DC
Current via power jumper contacts (max.)	10 A DC
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Stripped lengths, 750/753 Series	8 ... 9 mm / 0.33 in
	9 ... 10 mm / 0.37 in
Width	12 mm
Weight	45.5 g
EMC: CE - immunity to interference	acc. to EN 50082-2 (1996)
EMC: CE - emission of interference	acc. to EN 50081-1 (1993)
EMC: marine applications	
- immunity to interference	acc. to Germanischer Lloyd (2003)
EMC: marine applications	
- emission of interference	acc. to Germanischer Lloyd (2003)