


## Data sheet | Item number: 870-410

Push-in type jumper bar; insulated; 10-way; Nominal current 18 A; light gray

[www.wago.com/870-410](http://www.wago.com/870-410)

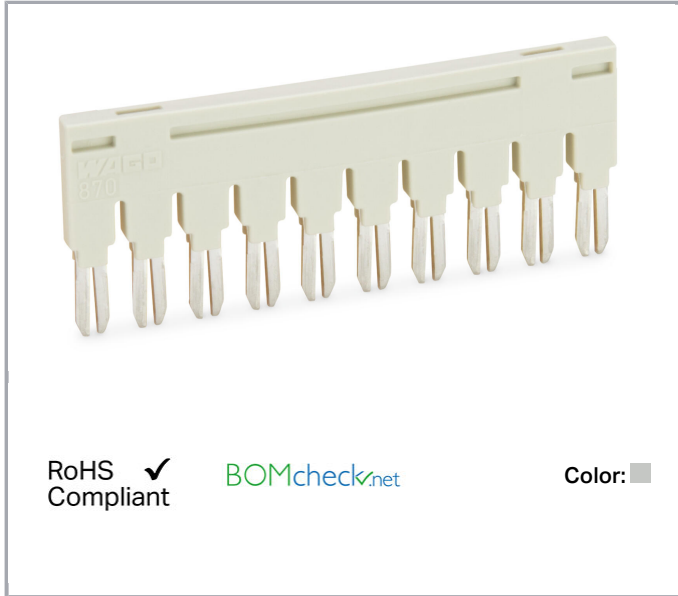

### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

#### Approvals Ex

Rated current (Ex e II)	13.5 A
-------------------------	--------

#### Geometrical Data

Width	49 mm / 1.929 inch
Depth	2.5 mm / 0.098 inch

#### Material Data

Color	light gray
Fire load	0.047 MJ

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Commercial data

Packaging type BOX

---

## Downloads

### Documentation

#### Bid Text

870-410 doc - Datei	Jan 4, 2018	doc 24.1 kB	Download
------------------------	-------------	----------------	----------

---

870-410 X81 - Datei	Feb 19, 2019	xml 2.6 kB	Download
------------------------	--------------	---------------	----------

---

#### Additional Information

Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------

---

## CAD/CAE-Data

### CAD data

2D/3D Models 870-410	URL	Download
----------------------	-----	----------

---

### CAE data



WSCAD Universe 870-410	Download
------------------------	----------

---

## Installation Notes

Jumpered

Subject to changes.

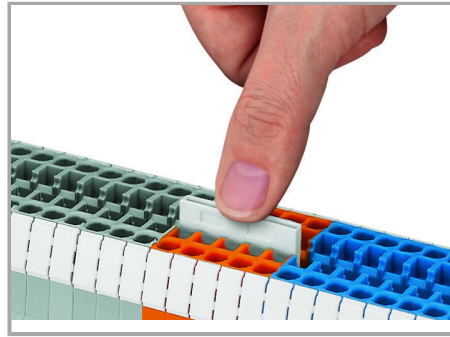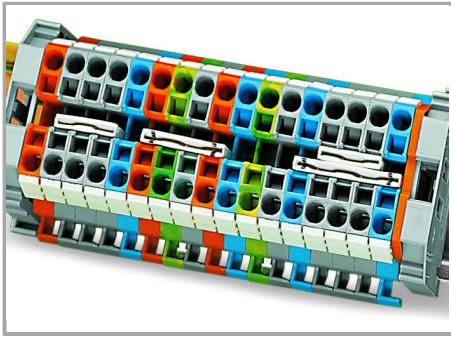

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or  
1 – – 4 – – 7

upon request

Subject to changes.