

Field Side Connection Module

24 V DC

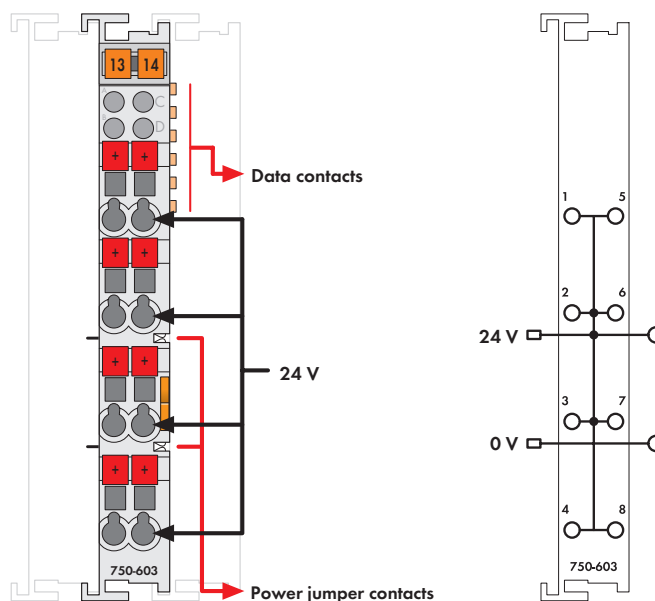


Fig. 750 Series/Technical data see page 24/Delivered without miniature WSB markers
750/753 Series marking see pages 10 ... 11 / 12 ... 13

The field side connection module provides 24V power for the inputs of the 8-channel input module 750-430/-431, eliminating external terminal blocks.

The 24V supply and 0V potential are derived from the internal power jumper contacts of an adjacent upstream I/O module. A connection of the potentials to the downstream I/O modules is made automatically via the power jumper contacts when snapping the I/O modules together. The 24V power is available to all eight field side CAGE CLAMP® connections and the 0V potential is passed through without being used by the module.

[illegible][illegible]