


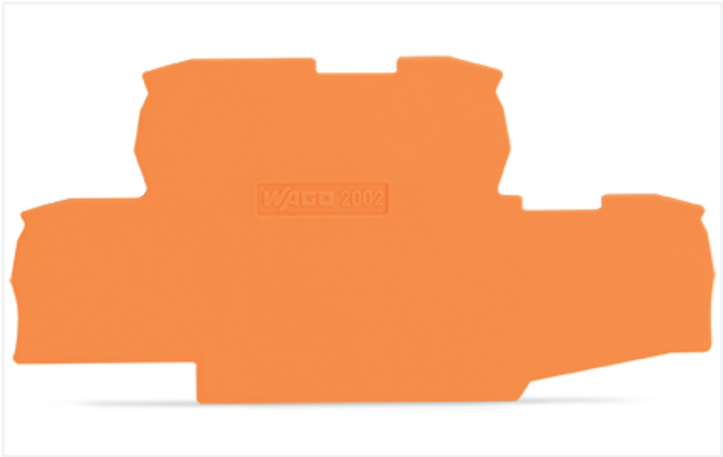

Color: ■ orange

Physical data	
Width	0.8 mm / 0.031 inches
Height	91.9 mm / 3.618 inches
Depth	47.7 mm / 1.878 inches

Mechanical data	
Mounting type	snap-on type

Material data	
Note (material data)	Information on material specifications can be found here
Color	orange
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.127 MJ
Weight	4.2 g

Environmental requirements

Environmental Testing		Environmental Testing	
Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	Voltage drop measurement before and after each axis	Passed
Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04	Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard
Spectrum/Mounting location	Service life test, Category 1, Class A/B	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz
Functional test with noise-like oscillations	Test passed according to Section 8 of the standard	Acceleration	0.572g (highest test level used for all axes)
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz	Test duration per axis	5 h
Acceleration	0.101g (highest test level used for all axes)	Test directions	X, Y and Z axes
Test duration per axis	10 min.	Extended testing: Monitoring of contact faults and interruptions	Passed
Test directions	X, Y and Z axes	Extended testing: Voltage drop measurement before and after each axis	Passed
Monitoring of contact faults and interruptions	Passed	Shock test	Test passed according to Section 10 of the standard
		Shock pulse form	Half sine
		Acceleration	5g (highest test level used for all axes)



Environmental Testing	
Shock duration	30 ms
Number of shocks (per axis)	3 pos. und 3 neg.
Test directions	X, Y and Z axes
Extended testing: Monitoring of contact faults and interruptions	Passed
Extended testing: Voltage drop measurement before and after each axis	Passed
Vibration and shock stress for rolling stock equipment	Passed

Commercial data		
PU (SPU)	100 (25) pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4055143622028	
Customs tariff number	85389099990	

Product Classification		
UNSPSC	39121702	
eCl@ss 10.0	27-14-11-33	
eCl@ss 9.0	27-14-11-33	
ETIM 9.0	EC000886	
ETIM 8.0	EC000886	
ECCN	NO US CLASSIFICATION	

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Railway Ready

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 2002-2792





Documentation

Bid Text			
2002-2792	19.02.2019	xml 2.51 KB	↓
2002-2792	03.01.2018	doc 23.50 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 2002-2792	↓

CAE data	
EPLAN Data Portal 2002-2792	↓
ZUKEN Portal 2002-2792	↓