




FRONT



SIDE

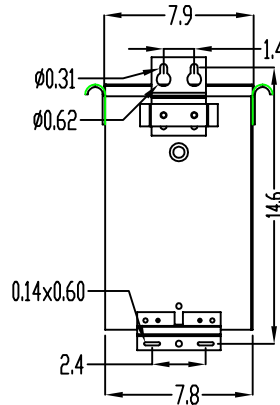


BACK 1




BACK 2

BOTTOM



For field connections, use wires insulated for a minimum of 75°C

CONNECTION DIAGRAM




Windings X and H must be connected in either a parallel or series configuration

HIGH VOLTS	INTERCONNECT	CONNECT HIGH LINES TO
480	H2 to H3	H1 - H4
240	H1 to H3 H2 to H4	H1 - H4
LOW VOLTS	INTERCONNECT	CONNECT LOW LINES TO
240	X2 to X3	X1 - X4
120/240	X2 to X3	X1 - X2 - X4
120	X1 to X3 X2 to X4	X1 - X4

0190 SR

KVA	CATALOG NO.	HV	LV	ENCLOSURE	SOUND LEVEL	NO LOAD LOSSES
5.0	T1005K0190C	240X480	120/240	NEMA 3R	40 db	80 W

PHASE	FREQ.	IMPEDANCE	TEMP RISE	TYP. EFFIC.	INS. SYS(C)	TOTAL LOSSES @ OPERATING TEMP	WDG. MATL.	WEIGHT
1	60Hz	10.5%	135°C		200	243 W		110 lbs

A	N/A	RELEASED	AJP			
REV	ECO	DESCRIPTION	BY	ENG	DATE	
BRAND						
CONFIDENTIAL AND PROPRIETARY THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF ACME ELECTRIC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACME ELECTRIC IS PROHIBITED		NAME	DATE	 T1005K0190C		
		DRAWN	F.I.L.			2/14/25
		CHECKED				
		ENG APPR.				
		DIMENSIONS IN INCHES		TITLE:		
		SCALE: 1:		T1005K0190C		
		SHEET 1 OF 1		SIZE B	REV A	