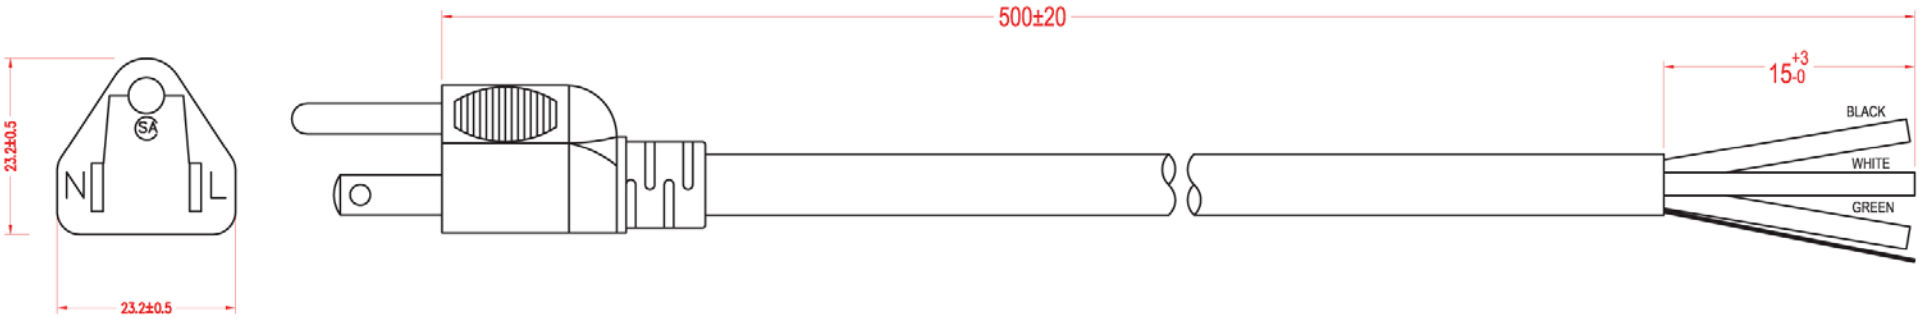

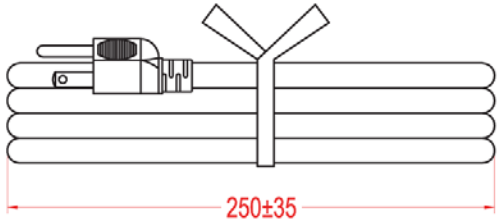



COPPER CONDUCTOR (N/mm):
41/0.254±0.005 or Substitute

PVC INSULATION AVERAGE
THICKNESS: 0.76mm
ID: 3.40±0.1mm

Aluminum/Mylar(Conducting face drainage wire)

Drain wire
7/0.254 or Substitute

PVC JACKET AVERAGE
THICKNESS: 0.76mm
OD: 9.30 ±0.2mm

Material:

- SJT 3x14AWG(2.08MM^2) VW-1 Shielded, 60° 300V,Without Filler
- Jacket Color: Black
- E- Green; L- Black; N- White

Electrical Test :

- 100% Open & Short Testing
- Insulation Resistance : 100meg-ohm(Min.)
- Voltage : 500V DC / 1 Min.

Unit: mm

RoHS Compliant

Scale	Free
TOLERANCE	
X.	±X
X.X	±X
X.XX	±X
DIM	TOL
X.°	±X°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name

	Date	Name
Drawn	25.06.13	Wilson
Approved	25.06.13	Groll

ASSMANN WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title
Power cord - Plug ⇔ Open End
SJT, 14AWG, 60°C, Shielded, 0.5 meter

ASSMANN WSW-No.
AK500/14-OE-5-0.5

Drawing-No.

rev00

Replace

Sheet 1/1