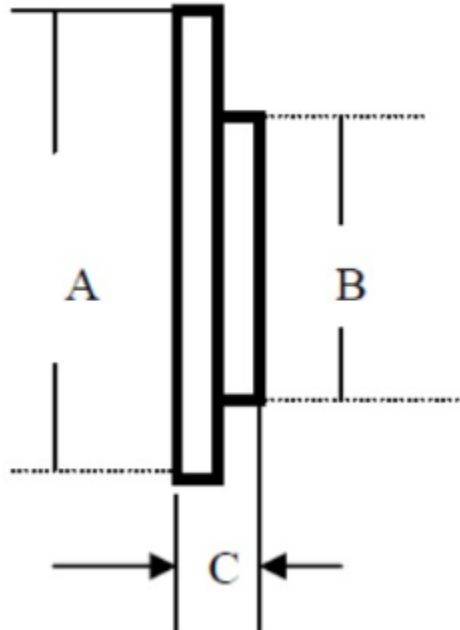


Specifications:

Voice Coil Impedance (Ω)	$8 \pm 15\%$ at 2000 Hz / 1.0 V
Rated Input (W)	0.25
Max. Input (W)	0.25
Lowest Resonance Freq F_0 (Hz)	$1000 \pm 20\%$
Frequency Range (Hz)	$F_0 \sim 4000$
Output S.P.L. (dB)	76 ± 3 at 0.25W 0.1m1k,1.2k,1.5k,2.0kHZ 62 ± 3 at 1W 1M 1k, 1.2k, 1.5, 2.0 kHz
Operation / Storage Temp	-25 to 50°C / -25 to 55°C
Weight (g)	12.0
Housing Color	Green
Options	For other options contact factory

Dimensions: (units: mm)**ROHS Compliant**

$$A=20\pm 0.3 ; B=14.5\pm 0.3 ; C=5\pm 0.3$$

Tolerance: $\pm 0.3\text{mm}$