

1HE14-RB

M

DRAWING NUMBER

X

ISSUE

8

REPLACES X42558-HE

RELEASE NO. PR-8223

CHECK

REVISIONS

A PR-8223
G J W
25 OCT 79

B C047573
T S M
17 JULY 80

C C050041
R J H
22 SEP 81

CHECK

26 OCT 79

C E B

25 OCT 79

DRAWN




G J W

FO-32851-A

MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929


SWITCH — ENCLOSED

CATALOG LISTING
1HE14-RB

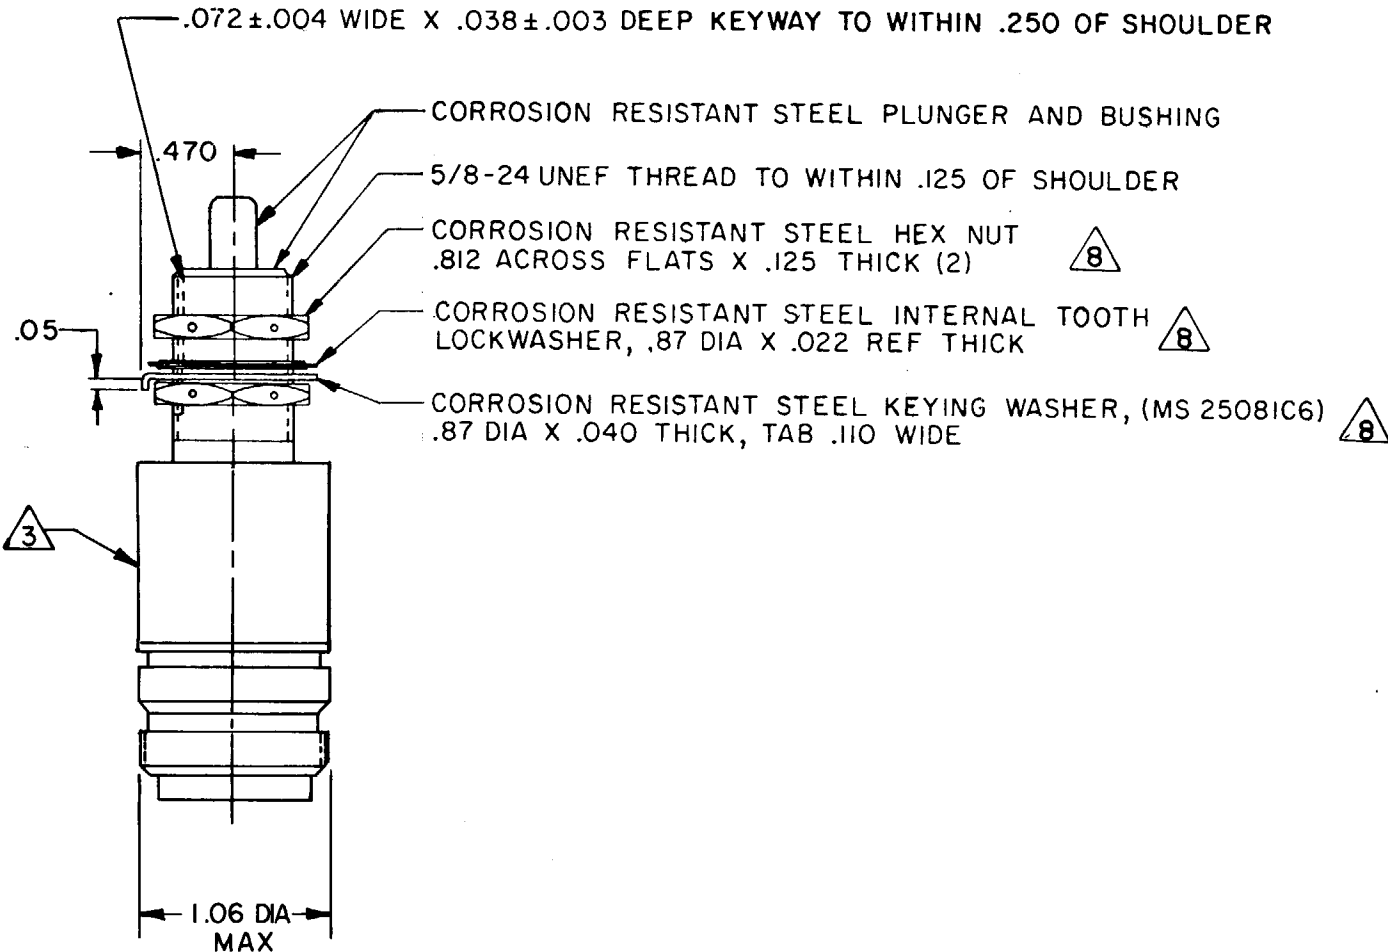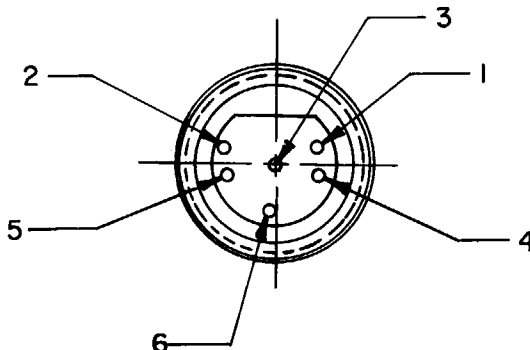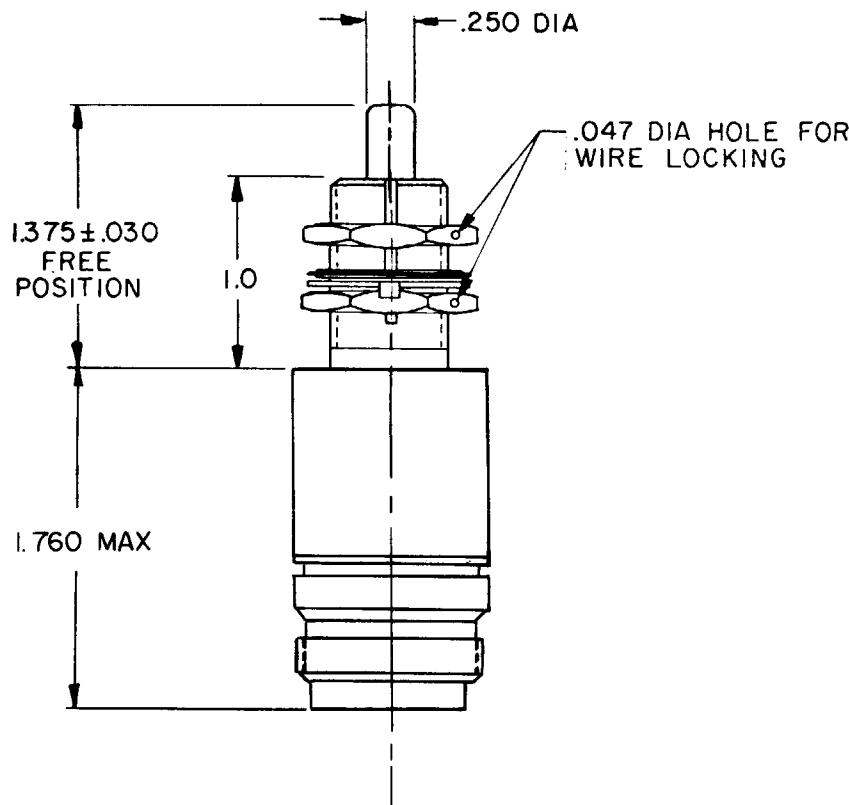

- NOTES
- 1 - ALL EXPOSED PARTS ARE CORROSION RESISTANT STEEL
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 5
 - 3 - CIRCUIT IDENTIFICATION, DATE CODE AND CATALOG LISTING 1HE14-RB PERMANENTLY MARKED ON SIDE OF HOUSING
 - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 INCH OF PLUNGER TRAVEL
 - 5 - FOR OPERATION IN TEMPERATURES OF MINUS 65°F TO PLUS 257°F
 - 6 - CONTACTS HERMETICALLY SEALED AS DEFINED BY ENCLOSURE DESIGN SYMBOL 5 PER MIL-S-8805B
 - 7 - CONNECTOR SECTION TO MATE WITH CONNECTOR BUORD 2017223 OR BURTON CONNECTOR 5006-0062
 - 8 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH



SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±			
DIM. mm	TOL. mm/in.	DIM. in.	TOL. mm/in.
NO PLACES	X 1/04		
ONE PLACE	X,X 0.4/0.16	X,X	0.8/0.3
TWO PLACES	X,X,X 0.15/.006	X,X,X	0.38/0.1
THREE PLACES		X,X,X,X	0.13/0.05
ANGLES			
SI METRIC		US CUSTOMARY	
DESIGN UNITS			
RAW MATERIAL—COMMERCIAL STANDARD			
MICRO SWITCH STANDARDS APPLY			
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED			
WEIGHT 5.0 OZ. MAX			

CHARACTERISTICS	
OPERATING FORCE	6-12 LB
FULL OVERTRAVEL FORCE	30 LB MAX
RELEASE FORCE	4 LB MIN
PRETRAVEL	.040 MAX
DIFFERENTIAL TRAVEL	.020 MAX
OVERTRAVEL	.250 MIN

ELECTRICAL DATA		
CONTACT ARRANGEMENT		
S P D T (2)		
	28 VDC SEA LEVEL	28 VDC 100,000 FT.
RES	5	5
IND	3	3
MOTOR	4	4

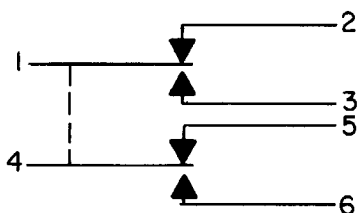

CIRCUIT DIAGRAM