

Cable - FLK 50/EZ-DR/ 850/KONFEK



2289654

<https://www.phoenixcontact.com/us/products/2289654>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 8.5 m

Commercial Data

Item number	2289654
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Sales Key	C02
Product Key	CK2131
Catalog Page	Page 536 (C-5-2019)
GTIN	4017918057718
Weight per Piece (including packing)	1,343.5 g
Weight per Piece (excluding packing)	1,328.7 g
Customs tariff number	85444290
Country of origin	DE

Technical Data

Product properties

Product type	System cable
Insulation characteristics	
Overvoltage category	II
Pollution degree	2
Insulation	Functional insulation

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP00
Degree of protection Installation location	≥ IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 70 °C (fixed installation) -10 °C ... 70 °C (flexible installation)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m

Electrical properties

Max. permissible operating voltage	25 V AC
	60 V DC
Nominal operating mode	100% operating factor
Max. current carrying capacity per path	1 A (50 °C)
	0.6 A (70 °C)
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV

Supported controller SIEMENS S7-1500

Suitable I/O card	6ES7521-1BL00-0AB0
	6ES7521-1BL10-0AA0
	6ES7522-1BL00-0AB0
	6ES7522-1BL01-0AB0
	6ES7522-1BL10-0AA0
	6ES7523-1BL00-0AA0
	6ES7531-7KF00-0AB0
	6ES7531-7LH00-0AB0
	6ES7531-7MH00-0AB0
	6ES7531-7NF00-0AB0
	6ES7531-7NF10-0AB0
	6ES7531-7PF00-0AB0
	6ES7532-5HF00-0AB0

Supported controller SIEMENS S7-300 / ET 200 M

Cable - FLK 50/EZ-DR/ 850/KONFEK

2289654

<https://www.phoenixcontact.com/us/products/2289654>



Suitable I/O card	CPU 313C
	CPU 313C-2DP
	CPU 313C-2PiP
	CPU 314C-2DP
	CPU 314C-2PiP
	6ES7321-1BL00-0AA0
	6ES7322-1BL00-0AA0
	6ES7322-8BH01-0AB0
	6ES7323-1BL00-0AA0
	6ES7331-1KF01-0AB0
	6ES7331-7NF00-0AB0
	6ES7331-7NF10-0AB0
	6ES7331-7PF01-0AB0
	6ES7331-7PF11-0AB0
	6ES7332-5HF00-0AB0
	6ES7350-2AH01-0AE0
6ES7357-4AH01-0AE0	

Supported controller SIEMENS S7-400

Suitable I/O card	6ES7421-1BL01-0AA0
	6ES7421-7BH01-0AB0
	6ES7421-7DH00-0AA0
	6ES7422-1BL00-0AA0
	6ES7422-7BL00-0AB0
	6ES7431-0HH0-0AB0
	6ES7431-1KF00-0AB0
	6ES7431-1KF10-0AB0
	6ES7431-1KF20-0AB0
	6ES7431-7KF00-0AB0
	6ES7431-7KF10-0AB0
	6ES7431-7QH00-0AB0
	6ES7432-1HF00-0AB0

Supported controller SCHNEIDER ELECTRIC Modicon TSX QUANTUM

Suitable I/O card	DDI 353
	DDI 841
	DDI 853
	DAI 340
	DAI 440
	DAI 453
	DDO 353
	DDM 390
	ACI 030
	ACI 040
	ATI 030

Cable - FLK 50/EZ-DR/ 850/KONFEK



2289654

<https://www.phoenixcontact.com/us/products/2289654>

	ARI 030
	AVI 030
	ACO 020
	ACO 130
	AVO 020
	EHC 105
	EHC 202

Supported controller ALLEN-BRADLEY ControlLogix

Suitable I/O card	1756-IA16I
	1756-IB16D
	1756-IB16I
	1756-IB32
	1756-IH16I
	1756-OB32
	1756-IF8
	1756-IF16
	1756-HSC
	1756-M02AE

Supported controller HONEYWELL Experion PKS C200

Suitable I/O card	TC-IDK 161
	TC-IDX 161
	TC-IDJ 161
	TC-IDD 321
	TC-ODD 321
	TC-IAH 161

Cable / line

Cable length	8.5 m
--------------	-------

50X0.14 [PVC]

UL AWM Style	2464/1061
Number of positions	50
Shielded	no
Cable type	50X0.14 [PVC]
Conductor type	Round cable set
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Conductor cross section	50x 0.14 mm ²
Wire diameter incl. insulation	1 mm ±0.03 mm
External cable diameter	10.3 mm ±0.4 mm
Outer sheath, material	Semi-rigid PVC
External sheath, color	gray
Conductor material	Tin-plated Cu litz wires

Cable - FLK 50/EZ-DR/ 850/KONFEK



2289654

<https://www.phoenixcontact.com/us/products/2289654>

Cable resistance	≤ 145 Ω/km (20 °C)
Insulation resistance	≥ 20 MΩ*km (20 °C)
Smallest bending radius, fixed installation	86 mm
Smallest bending radius, movable installation	161 mm
Max. bending cycles	5000 (at a radius of ≥ 15x outside diameter)
Halogen-free	no
Flame resistance	IEC 60332-1-2 (raw cable)
	VDE 0842, Part 332-1-2 (raw cable)
	IEC 60332-3-22 (raw cable)
	UL VW-1
	CSA FT-1
Resistance to oil	can withstand occasional splashes (raw cable)
Type	Cable for one module
Cable, preassembly	Insulation displacement, IEC 60352-4/DIN EN 60352-4

color code

IDC/FLK50 (1)	IDC/FLK50 (1) = black
IDC/FLK50 (2)	IDC/FLK50 (2) = brown
IDC/FLK50 (3)	IDC/FLK50 (3) = red
IDC/FLK50 (4)	IDC/FLK50 (4) = orange
IDC/FLK50 (5)	IDC/FLK50 (5) = yellow
IDC/FLK50 (6)	IDC/FLK50 (6) = green
IDC/FLK50 (7)	IDC/FLK50 (7) = blue
IDC/FLK50 (8)	IDC/FLK50 (8) = violet
IDC/FLK50 (9)	IDC/FLK50 (9) = gray
IDC/FLK50 (10)	IDC/FLK50 (10) = white
IDC/FLK50 (11)	IDC/FLK50 (11) = white-black
IDC/FLK50 (12)	IDC/FLK50 (12) = white-brown
IDC/FLK50 (13)	IDC/FLK50 (13) = white-red
IDC/FLK50 (14)	IDC/FLK50 (14) = white-orange
IDC/FLK50 (15)	IDC/FLK50 (15) = white-yellow
IDC/FLK50 (16)	IDC/FLK50 (16) = white-green
IDC/FLK50 (17)	IDC/FLK50 (17) = white-blue
IDC/FLK50 (18)	IDC/FLK50 (18) = white-violet
IDC/FLK50 (19)	IDC/FLK50 (19) = white-gray
IDC/FLK50 (20)	IDC/FLK50 (20) = brown-black
IDC/FLK50 (21)	IDC/FLK50 (21) = brown-red
IDC/FLK50 (22)	IDC/FLK50 (22) = brown-orange
IDC/FLK50 (23)	IDC/FLK50 (23) = brown-yellow
IDC/FLK50 (24)	IDC/FLK50 (24) = brown-green
IDC/FLK50 (25)	IDC/FLK50 (25) = brown-blue
IDC/FLK50 (26)	IDC/FLK50 (26) = brown-violet
IDC/FLK50 (27)	IDC/FLK50 (27) = brown-gray
IDC/FLK50 (28)	IDC/FLK50 (28) = brown-white

Cable - FLK 50/EZ-DR/ 850/KONFEK



2289654

<https://www.phoenixcontact.com/us/products/2289654>

IDC/FLK50 (29)	IDC/FLK50 (29) = green-black
IDC/FLK50 (30)	IDC/FLK50 (30) = green-brown
IDC/FLK50 (31)	IDC/FLK50 (31) = green-red
IDC/FLK50 (32)	IDC/FLK50 (32) = green-orange
IDC/FLK50 (33)	IDC/FLK50 (33) = green-blue
IDC/FLK50 (34)	IDC/FLK50 (34) = green-violet
IDC/FLK50 (35)	IDC/FLK50 (35) = green-gray
IDC/FLK50 (36)	IDC/FLK50 (36) = green-white
IDC/FLK50 (37)	IDC/FLK50 (37) = yellow-black
IDC/FLK50 (38)	IDC/FLK50 (38) = yellow-brown
IDC/FLK50 (39)	IDC/FLK50 (39) = yellow-red
IDC/FLK50 (40)	IDC/FLK50 (40) = yellow-orange
IDC/FLK50 (41)	IDC/FLK50 (41) = yellow-blue
IDC/FLK50 (42)	IDC/FLK50 (42) = yellow-violet
IDC/FLK50 (43)	IDC/FLK50 (43) = yellow-gray
IDC/FLK50 (44)	IDC/FLK50 (44) = yellow-white
IDC/FLK50 (45)	IDC/FLK50 (45) = gray-black
IDC/FLK50 (46)	IDC/FLK50 (46) = gray-brown
IDC/FLK50 (47)	IDC/FLK50 (47) = gray-red
IDC/FLK50 (48)	IDC/FLK50 (48) = gray-orange
IDC/FLK50 (49)	IDC/FLK50 (49) = gray-yellow
IDC/FLK50 (50)	IDC/FLK50 (50) = gray-green

Connection data

Field level

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	50
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

Controller level

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	50
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm


Standards and regulations

Air clearances and creepage distances

Standards/regulations	DIN EN 50178
-----------------------	--------------

Drawings

Diagram

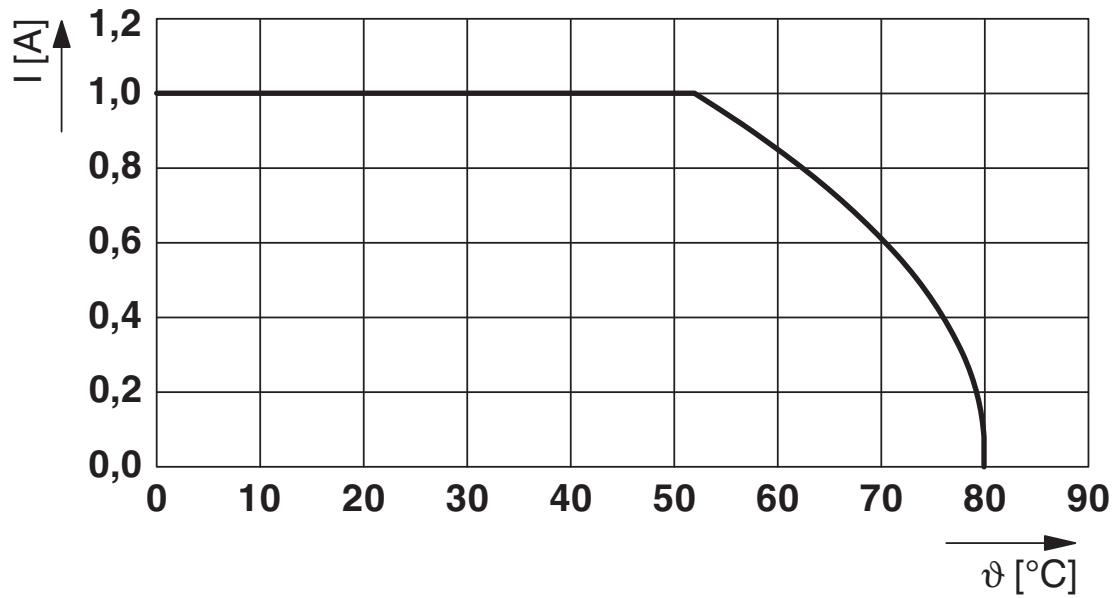

Maximum permissible current per path in uncoiled state

Cable - FLK 50/EZ-DR/ 850/KONFEK



2289654

<https://www.phoenixcontact.com/us/products/2289654>

Approvals



EAC

Approval ID: RU*-DE.HB*35.B00385



UL Listed

Approval ID: FILE E 238705

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	1 A	-	-



cUL Listed

Approval ID: FILE E 238705

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	125 V	1 A	-	-

cULus Listed

Cable - FLK 50/EZ-DR/ 850/KONFEK



2289654

<https://www.phoenixcontact.com/us/products/2289654>

Classifications

ECLASS

ECLASS-9.0	27242220
ECLASS-10.0.1	27242220
ECLASS-11.0	27242220

ETIM

ETIM 8.0	EC000237
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

Cable - FLK 50/EZ-DR/ 850/KONFEK



2289654

<https://www.phoenixcontact.com/us/products/2289654>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Cable - FLK 50/EZ-DR/ 850/KONFEK

2289654

<https://www.phoenixcontact.com/us/products/2289654>



Accessories

Cable marker carrier

Cable marker carrier - KME - 0807083

<https://www.phoenixcontact.com/us/products/0807083>



Cable marker carrier, white, unlabeled, mounting type: Assembly with cable ties, cable diameter: > 5 mm, lettering field size: 20 mm x 8 mm

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com