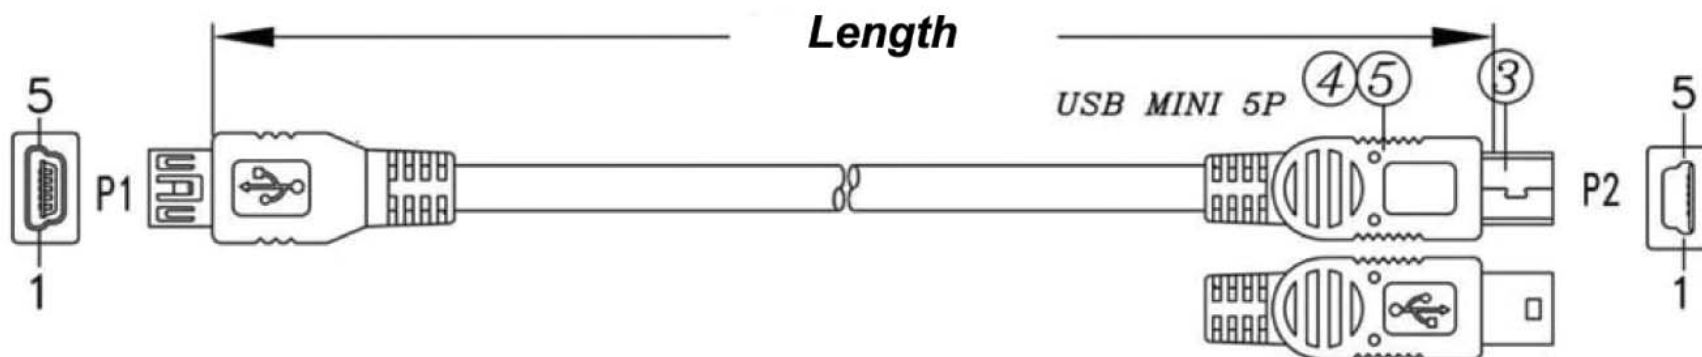


A

A

Part Number
AK669M-X-R


Length

1 1Meter

2 2Meters

13	PACKING TAPE COLOR YELLOW L=2200mm			1/100
12	TRANSPARENT ADHESIVE TAPE L=2600mm			1/100
11	CARTON 5 LAYER 40*30*20CM K=K GLUE TYPE			1/100
10	WATERPROOF BAG (14+15)*24" T=0.04mm			1/100
9	PE BAG 230*300*0.04mm PRINT BLACK MADE IN CHINA*+10PCS			1/10
8	PE BAG 100*200*0.04mm PRINT BLACK MADE IN CHINA*	1		PCS
7	ROHS LABEL 35*22mm WHITE/BOTTOM TEXT/BLACK			112/100
6	INNER MODEL LDPE		4	g
5	OUTER MODEL PVC 45P COLOR BLACK(CS-001)		9	g
4	ROUND TIN OD.8mm		0.4	g
3	USB MINI USB5P/M SOLDER TYPE PLASTIC BLACK		1	P2
2	USB MINI USB5P/F SOLDER TYPE PLASTIC BLACK		1	P1
1	USB UL2725 28AW*1P+28AW*2C+AL/MT+D+B0D3.8mm BLACK(CS-001)	01	1	2000mm
NO.PART NO.	DESCRIPTION	VENDER	QTY	UNIT/REF

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V



G

G

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°					 		
			Modification	Date	Name			

Item No.		AK669M-x-R	
Title		Min USB 5P/F to Min USB 5P/M Cable 1,000mm	
Drawing No.		rev00	
Replace		Sheet	

RoHS Complaint

ASSMANN
WVSV components

H

H