

Cable gland - G-INB-M20-S68N-PEPDS-LG - 1415174

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable gland, Application: Standard, External cable diameter 6 mm ... 13 mm, Shielding: No, Connecting thread: M20, Color: light gray, with bend protection sleeve

The figure shows version G-INB-M25-M68N-PEPDS-LG

Why buy this product

- Glow-wire test: 750°C
- Weatherproof sealing material
- Halogen-free

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	10 STK
GTIN	 4 055626 038056
GTIN	4055626038056
Weight per Piece (excluding packing)	22.000 g
Custom tariff number	39269097
Country of origin	Germany

Technical data

Dimensions

Length	103 mm
Wrench size, union nut	24 mm
Wrench size, support	24 mm
Hexagon angular dimension	27 mm

Cable gland - G-INB-M20-S68N-PEPDS-LG - 1415174

Technical data

Dimensions

Length of the connecting thread	12 mm
Feed-through hole diameter	20.1 mm ... 20.2 mm
External cable diameter	6 mm ... 13 mm
	7.5 mm ... 11.3 mm (for UL 514 B)

Ambient conditions


Degree of protection	IP68 (5 bar / 0.5 h)
	IP69 (DIN EN 60529 / IEC 60529)
Ambient temperature (operation)	-40 °C ... 100 °C (static)

General

No. of conductors	1
Shielded	No
Thread type on connection side	M20
Thread pitch	1.5 mm
Torque	4 Nm (Union nut)
	4 Nm (Support)
Color	light gray
Impact category	2
Execution of the strain relief	A
Manufacturer	WISKA
Manufacturer Designation	ESKVS 20

Drawings

Dimensional drawing

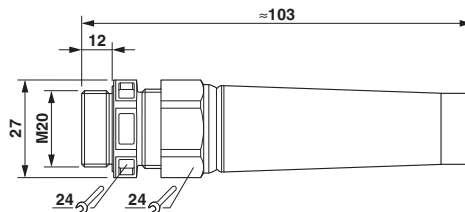

Approvals

Approvals

Cable gland - G-INB-M20-S68N-PEPDS-LG - 1415174





Approvals

Approvals

UL Recognized / cUL Recognized / GOST-R / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E179850
cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E179850
GOST-R			POCC DE.A*98.H12052
cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	
