

## Power cable - SAC-2P-MINMS/ 5,0-547 - 1416537

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Power cable, 2-position, PVC, yellow, Plug straight 7/8"-16UNF, on free cable end, Cable length: 5 m

### Why buy this product

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ High-performance: connectors and cables with a large conductor cross section for power supply

### Key Commercial Data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 STK    |
| Custom tariff number | 85444290 |
| Country of origin    | Mexico   |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

#### Ambient conditions

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Ambient temperature (operation) | -20 °C ... 105 °C (Plug / socket) |
| Degree of protection            | IP68                              |

#### General

|                             |                         |
|-----------------------------|-------------------------|
| Rated current at 40°C       | 13 A                    |
| Rated voltage               | 300 V                   |
| Number of positions         | 2                       |
| Insertion/withdrawal cycles | 100                     |
| Torque                      | 10 lb <sub>F</sub> -in. |
|                             | 1.12 Nm                 |

# Power cable - SAC-2P-MINMS/ 5,0-547 - 1416537

## Technical data

### Material

|                          |                   |
|--------------------------|-------------------|
| Contact material         | CuZn              |
| Contact surface material | AU                |
| Contact carrier material | PVC               |
| Material of grip body    | PVC               |
| Material, knurls         | Anodized aluminum |

### Cable


|  |   |
|--|---|
| Cable type                               | ITC/PLTC                                  |
| Cable abbreviation                       | 547                                       |
| AWG signal line                          | 18  |
| Conductor cross section signal conductor | 2 x AWG 18                                |
| Conductor cross section voltage supply   | 41 x AWG 34                               |
| Wire colors                              | Black 1, blue 2, grey 3, brown 4, white 5 |
| External sheath, color                   | yellow                                    |
| External cable diameter                  | 5.33 mm                                   |
| Outer sheath, material                   | PVC                                       |
| Conductor material                       | Bare Cu litz wires                        |
| Nominal voltage, cable                   | 300 V                                     |
| Flame resistance                         | UL 1581, FT4                              |
| Other resistance                         | UV resistant (720 h) UL 2256              |

### Standards and Regulations

|                  |                              |
|------------------|------------------------------|
| Flame resistance | UL 1581, FT4                 |
| Other resistance | UV resistant (720 h) UL 2256 |


## Drawings

Dimensional drawing

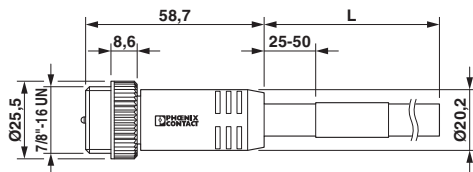

7/8"-16UNF plug, straight


Circuit diagram



Contact assignment of 7/8" plug

## Power cable - SAC-2P-MINMS/ 5,0-547 - 1416537

Schematic diagram



Pin assignment, plug, 7/8"-16UNF, 2-pos., view of male side

---

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>