

## Passive module - VIP-2/SC/FLK10/ROC AI-12 - 2905296

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOfACE Professional (VIP) board for the ROC800 controller

### Your advantages

- ✓ These system-specific interface modules for the ROC800 controller are used in combination with the relevant system cables
- ✓ Interface from field wiring to ROC800 controller
- ✓ Compact design reduces space requirements in the control cabinet
- ✓ Field side I/O marking clearly identified when device is mounted.
- ✓ Integrated ZB marker provides per-channel labeling
- ✓ Rugged metal mounting foot allows easy DIN rail installation and removal.



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 987974
GTIN	4046356987974
Weight per Piece (excluding packing)	100.000 g
Custom tariff number	85366990
Country of origin	United States

### Technical data

#### Dimensions

Width	34.5 mm
Height	65 mm
Depth	44.2 mm

# Passive module - VIP-2/SC/FLK10/ROC AI-12 - 2905296

## Technical data

### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Degree of protection	IP20

### General

Nominal voltage $U_N$	60 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	10
Status display	No
Mounting position	any

### Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Connection data 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	10
Pitch	2.54 mm

### Supported controller

Controller	Emerson ROC800
- suitable I/O card	ROC800 AI-12

### Standards and Regulations

Standards/regulations	IEC 60664
	DIN EN 50178
Pollution degree	2
Overvoltage category	II
Flammability rating according to UL 94	V0

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

# Passive module - VIP-2/SC/FLK10/ROC AI-12 - 2905296


## Technical data

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Circuit diagram

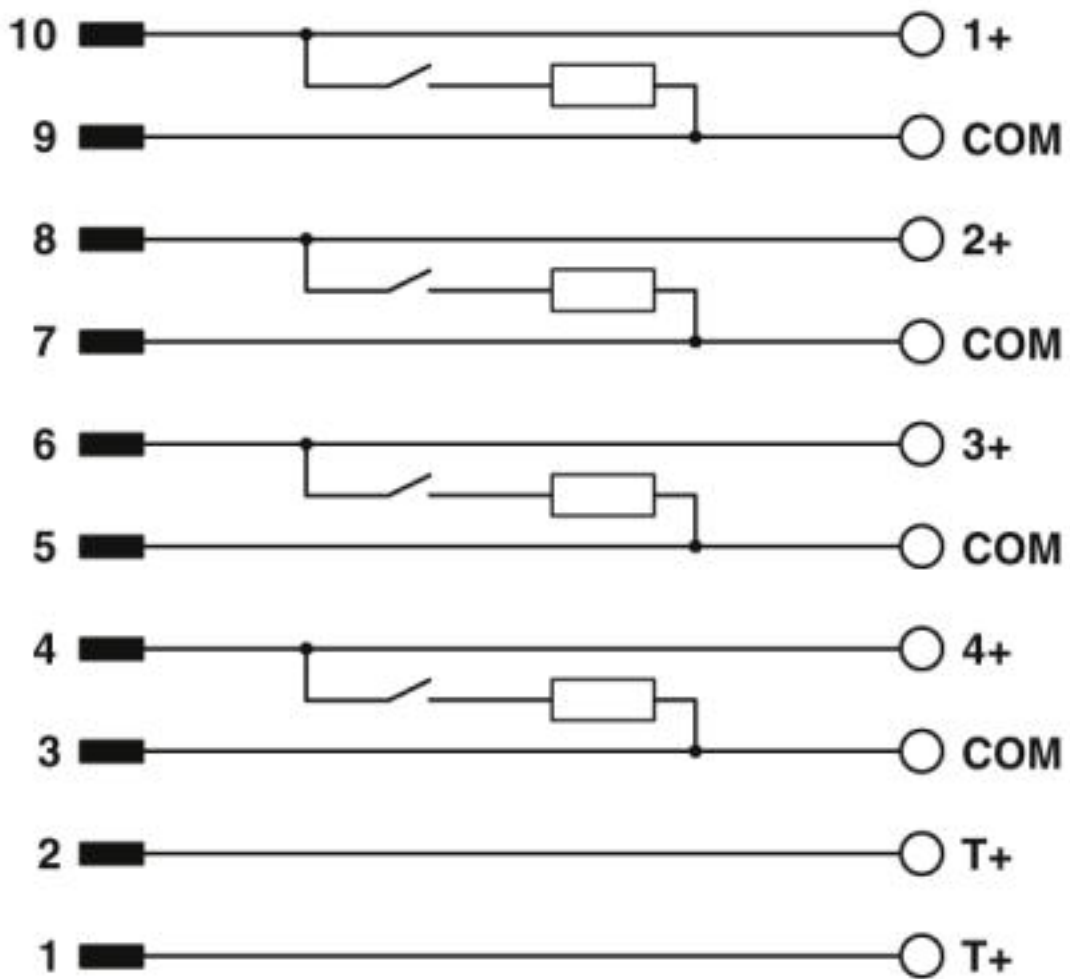

## Classifications

eCl@ss

eCl@ss 10.0.1	27141152
---------------	----------

# Passive module - VIP-2/SC/FLK10/ROC AI-12 - 2905296

## Classifications

### eCl@ss

eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27250300
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

### ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121432
UNSPSC 18.0	39121432
UNSPSC 19.0	39121432
UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

## Approvals

### Approvals

---

Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

Ex Approvals

---

### Approval details

# Passive module - VIP-2/SC/FLK10/ROC AI-12 - 2905296

## Approvals

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		60 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		30-12	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		60 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		30-12	

cULus Recognized	
------------------	--

## Accessories

### Accessories

#### System cable

Cable - VIP-CAB-FLK10/0,14/1,0M - 2318318



Round cable set; connection 1: IDC/FLK socket strip (1x 10-position, 180 °-Out put); connection 2: IDC/FLK socket strip (1x 10-position, 90 °-out put); cable length: 1 m

Cable - VIP-CAB-FLK10/0,14/1,5M - 2318321



Round cable set; connection 1: IDC/FLK socket strip (1x 10-position, 180 °-Out put); connection 2: IDC/FLK socket strip (1x 10-position, 90 °-out put); cable length: 1.5 m

## Passive module - VIP-2/SC/FLK10/ROC AI-12 - 2905296

### Accessories

Cable - VIP-CAB-FLK10/0,14/2,0M - 2318334



Round cable set; connection 1: IDC/FLK socket strip (1x 10-position, 180 °-Out put); connection 2: IDC/FLK socket strip (1x 10-position, 90 °-out put); cable length: 2 m

---

Cable - VIP-CAB-FLK10/0,14/3,0M - 2318347



Round cable set; connection 1: IDC/FLK socket strip (1x 10-position, 180 °-Out put); connection 2: IDC/FLK socket strip (1x 10-position, 90 °-out put); cable length: 3 m

---

Cable - VIP-CAB-FLK10/0,14/4,0M - 2318350



Round cable set; connection 1: IDC/FLK socket strip (1x 10-position, 180 °-Out put); connection 2: IDC/FLK socket strip (1x 10-position, 90 °-out put); cable length: 4 m

---

Cable - VIP-CAB-FLK10-0,14/... - 2318376



Round cable set; connection 1: IDC/FLK socket strip (1x 10-position, 180 °-Out put); connection 2: IDC/FLK socket strip (1x 10-position, 90 °-out put); cable length: variable

---

### Necessary add-on products

Front adapters - FLKM 10-PA-ROC800 - 2904889



VARIOFACE front adapters for ROC800 controller

---

