

Interface module - VIP-2/PT/D15SUB/M/LED - 2904259

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connection and D-SUB miniature pin strip, for mounting on NS 35 rails, with LED, 15-pos.



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 813266

Technical data

Dimensions

Width	52 mm
Height	72.1 mm
Depth	46.6 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	24 V DC
Max. perm. current (per branch)	2 A
Number of positions	15
Status display	LED
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Rated surge voltage	1.2 kV
Degree of pollution	2

Interface module - VIP-2/PT/D15SUB/M/LED - 2904259

Technical data

General

Overvoltage category	II
----------------------	----

Connection data for connection 1

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Connection data for connection 2

Connection name	Controller level
Connection method	D-SUB pin strip
Number of connections	1
Number of positions	15

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	II

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421

Interface module - VIP-2/PT/D15SUB/M/LED - 2904259

Classifications

UNSPSC

UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

CSA	
mm ² /AWG/kcmil	26-14
Nominal current I _N	2 A
Nominal voltage U _N	24 V

UL Recognized	
mm ² /AWG/kcmil	26-14
Nominal current I _N	2 A
Nominal voltage U _N	24 V

cUL Recognized	
mm ² /AWG/kcmil	26-14
Nominal current I _N	2 A

Interface module - VIP-2/PT/D15SUB/M/LED - 2904259

Approvals

Nominal voltage UN	24 V
--------------------	------


EAC

EAC

cULus Recognized

Drawings

Circuit diagram

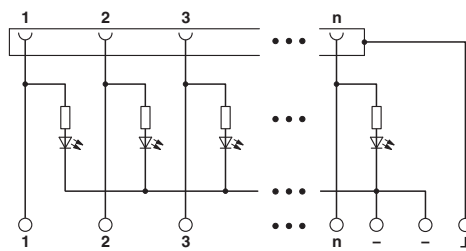

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>