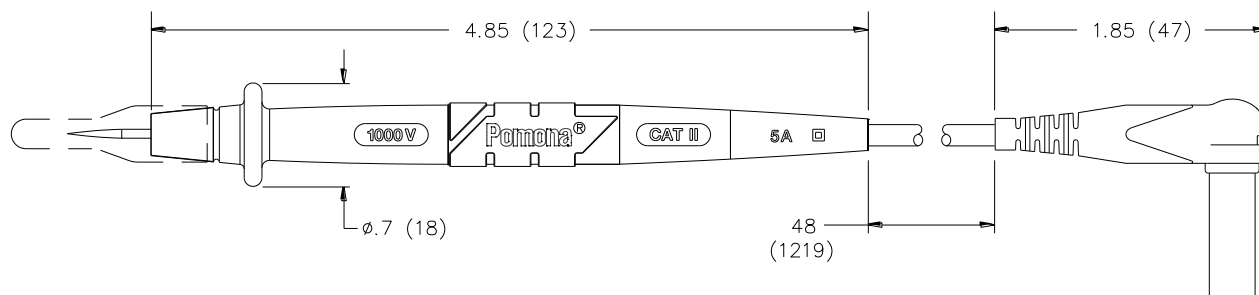


Model 6477
Replaceable Tip Test Probe Set**FEATURES**

- Replaceable tip probe set with sharp stainless steel tip included. (Other tips are available, see model 6475)
- Designed for most DMM's including Fluke, Wavetek Meterman, Amprobe, and others with safety-sheath banana jack inputs
- Thermoplastic elastomer outer coat provides comfortable grip and flexible strain relief
- Probe and banana plug are molded directly onto the wire for robust pull strength
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety
- Banana plug spring is nickel plated Beryllium Copper for long insertion life

MATERIALS

Probe:

Outer Insulation: Santoprene® rubber, color: gray

Inner Insulation: Polypropylene, color: one black, one red

Tip: sharp stainless steel

Wire: 18 AWG, 192 x 41 bare copper, Silicone Insulation, O.D. 0.144" (3,66mm)

Banana Plug: Nickel plated Brass

Spring – Nickel plated Beryllium Copper

Plug Insulation: Polypropylene, color: one black, one red

RATINGS

IEC 61010-031

Operating Voltage: CAT II 1000 V

Current: 5 Amperes

ORDERING INFORMATION

Model 6477

Includes a set of one black and one red test lead with two replaceable tips

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.