


B

A

B


A

DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	—
—	—	—	—

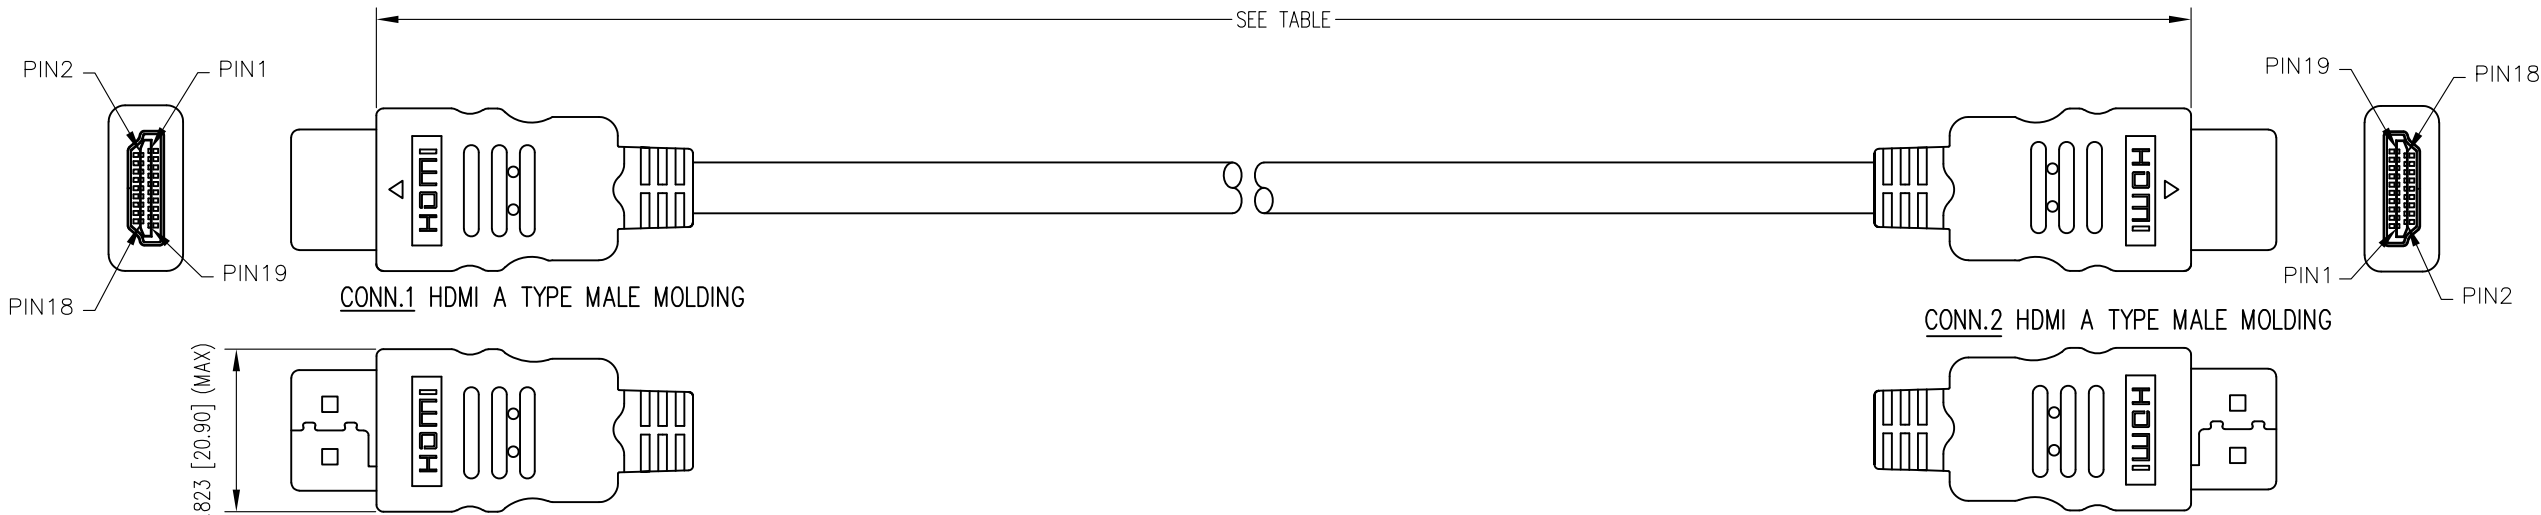


NOTES:


- CONNECTOR COMPONENTS:
TRANSPARENT DUST COVER
INSIDE MOLDING: PE
OUTSIDE MOLDING: 45P PVC, BLACK
SHELL PLATING: GOLD FLASH
CONTACT: GOLD PLATING
HIGH SPEED HDMI WITH ETHERNET CABLE: UL20276 [28AWG(7/0.127TC)*1PR +DW(1/0.32CCS)+AL/MYLAR]*5P+28AWG(1/0.32CCS)*3C+28AWG(7/0.127TC) +FILLER+AL/MY+DW(7/0.127TC)+BRAID(16/5/0.12Al/mg)+JACKET
OD: 0.29±.008 [7.3±0.2] COLOR: BLACK
CABLE PRINTING: HIGH SPEED HDMI® CABLE WITH ETHERNET E342987 AWM
STYLE 20276 80°C 30V VW-1 --- c AWM I/II A/B 80°C 30V FT1
- ELECTRICAL TESTING:
100% OPEN & SHORT & CONTINUITY WIRE TEST
CONTACT RESISTANCE: 5 OHM MAX.
INSULATION RESISTANCE: 10M OHM MIN.
HI-POT:100V DC/10ms
- PACKAGING:
ONE CABLE PER BAG



PIN ASSIGNMENT

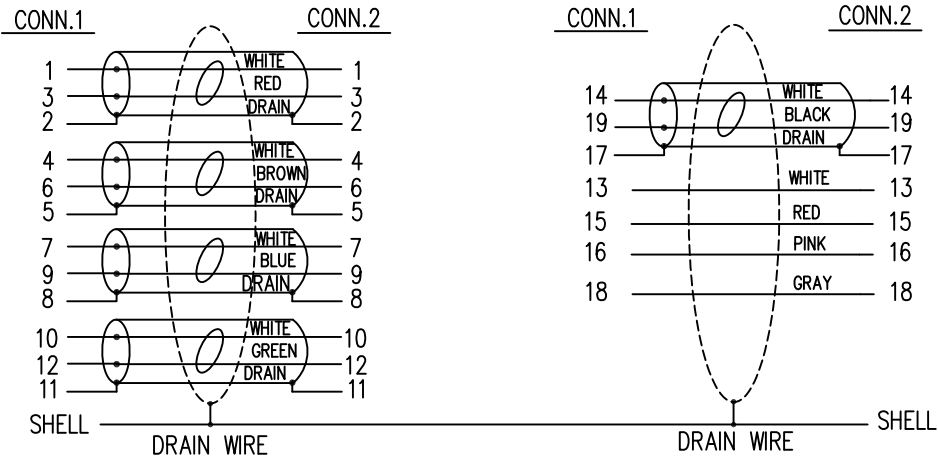

P/N	LENGTH
BC-HH003F	36±0.8 [915±20]
BC-HH006F	72±1.2 [1830±30]
BC-HH010F	120±1.6 [3050±40]



THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ± 1°

SHEET NO. 1 OF 1

206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

TITLE: HDMI-A MALE TO HDMI-A MALE CABLE

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
BEL FUSE, INC. AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF BEL FUSE, INC.

DRN BY: JMM	DATE 05/16/19
APPD BY: ADB	DATE 05/29/19
DWG NO. CT999189	REV. A0