

VSSC
VSSC6 MOV 240VAC/DC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Overvoltage protection with individual components with varistors in terminal design
The metal-oxide varistors can be used in terminal design. They are approved for a maximum sine-wave-form power-frequency operating voltage, which is printed on the component. Any voltages greater than the permitted maximum are discharged safely within 25 ns. Varistors are used for medium to high power.

General ordering data

Type	VSSC6 MOV 240VAC/DC
Order No.	1064630000
Version	Surge protection for instrumentation and control, 240 V, 339 V, 12 A, According to IEC61643-21
GTIN (EAN)	4032248829941
Qty.	5 pc(s).

Creation date August 18, 2020 8:08:31 AM CEST

Catalogue status 14.08.2020 / We reserve the right to make technical changes.

VSSC
VSSC6 MOV 240VAC/DC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	12.4	Width (inches)	0.488 inch
Height	88.5 mm	Height (inches)	3.484 inch
Depth	81 mm	Depth (inches)	3.189 inch
Net weight	60.4 g		

Temperatures

Humidity	5...96 %	Operating temperature, max.	70 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	80 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...80 °C		

Probability of failure

λges	26	MTTF	4,391 Jahre
PFH in 1*10 ⁻⁹ per hour	0	SFF	100 %
SIL in compliance with IEC 61508	3		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (UL)	E311081	UL certificate	UL Zertifikat
----------------------	---------	----------------	---------------

CSA protection data

Gas group C	IIB	Gas group D	IIA
Gas groups A, B	IIC	Input current, max. I _i	12 A
Input voltage, max. U _i	407 V	Internal capacity, max. C _i	1 nF
Internal inductance, max. L _i	0 μH		

General data

Colour	black	Design	Terminal
Isolating function	No	Optical function display	No
Protection degree	IP20	Rail	TS 35
Segment	Measurement - Monitoring - Setting	UL 94 flammability rating	V-0
Version	Surge protection for measurement and control		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

VSSC
VSSC6 MOV 240VAC/DC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Rated data IEC / EN**

Rated voltage (AC)	240 V	Rated voltage (DC)	339 V
Voltage type	AC/DC	Max. continuous voltage, U_c (AC)	288 V
Max. continuous voltage, U_c (DC)	407 V	Discharge current, max. (8/20 μ s)	12 kA
Discharge current I_n (8/20 μ s) wire-PE	1.5 kA	Discharge current I_{max} (8/20 μ s) wire-PE	6 kA
Standards	According to IEC61643-21	Protection level U_p (typ.)	\leq 1200 V
Capacitance	0.5 nF	Number of poles	1
Overload - failure mode	Mode 1	Rated current I_N	12 A
Requirements category acc. to IEC 61643-21	C1, C2	Surge current-carrying capacity C1	0.5 kA 8/20 μ s 1 kV 1.2/50 μ s
Surge current-carrying capacity C2	1.5 kA 8/20 μ s	Volume resistance	$<$ 0.1 Ω

Further details of approvals

GOST certificate	GOST-Zertifikat
------------------	-----------------

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.5 Nm
Tightening torque, max.	0.8 Nm	Clamping range, min.	0.5 mm ²
Clamping range, max.	4 mm ²	Wire cross-section, solid, min.	0.5 mm ²
Wire cross-section, solid, max.	6 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	4 mm ²	Connection cross-section, stranded, min.	0.5 mm ²
Connection cross-section, stranded, max.	4 mm ²		

Classifications

ETIM 6.0	EC000943	ETIM 7.0	EC000943
eClass 9.0	27-13-08-07	eClass 9.1	27-13-08-07
eClass 10.0	27-13-08-07	UNSPSC	30-21-18-11

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	SIL Paper CE PAPER Declaration of Conformity
Brochure/Catalogue	CAT 4.4 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	Instruction sheet VSSC

Creation date August 18, 2020 8:08:31 AM CEST


Catalogue status 14.08.2020 / We reserve the right to make technical changes.

Data sheet


**VSSC
VSSC6 MOV 240VAC/DC**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

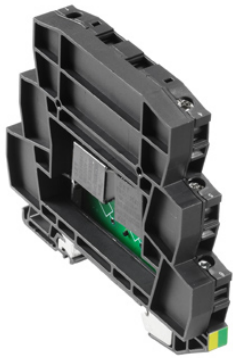

Similar to illustration

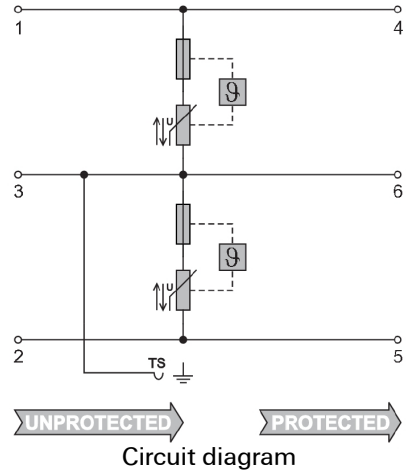

Circuit diagram