


SlimFix SF 1/12 MC NE GE V2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



Similar to illustration

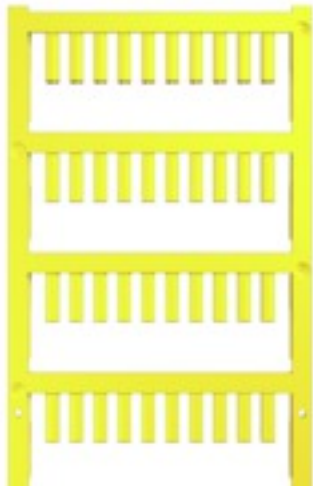

SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	SF 1/12 MC NE GE V2
Order No.	1919340000
Version	SlimFix, Conductor and cable markers, 1.7 - 2.1 mm, 12 x 3.2 mm, yellow
GTIN (EAN)	4032248555710
Qty.	400 pc(s).
compatible printer	1324380000 2438520000 2438510000

**SlimFix
SF 1/12 MC NE GE V2**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	3.2 mm	Width (inches)	0.126 inch
Height	12 mm	Height (inches)	0.472 inch
Depth	3.2 mm	Depth (inches)	0.126 inch
Net weight	0.16 g		

General data

Colour	yellow	Halogen	No
Material	Polyamide 66	Material colour according to resistance code	4
Operating temperature range	-40...100 °C	Recommended industries	Transportation, Machinery
Size of labelling field	12 x 3.2 mm	Type of printing	neutral
UL 94 flammability rating	V-2	Width	3.2 mm

Conductor and cable markers

Conductor O.D.	1.7 - 2.1 mm	Conductor O.D., max.	2.1 mm
Conductor O.D., min.	1.7 mm	Conductor cross-section, max.	0.75 mm ²
Conductor cross-section, min.	0.5 mm ²	Halogen	No

Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
eClass 9.0	27-40-04-01	eClass 9.1	27-40-04-01
eClass 10.0	27-40-04-01	UNSPSC	44-12-17-08

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP
Software	M-Print PRO configuration file

Data sheet

SlimFix
SF 1/12 MC NE GE V2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

